
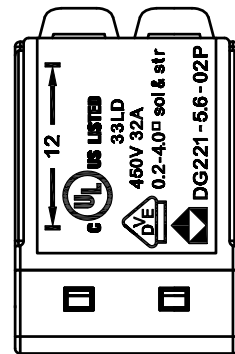

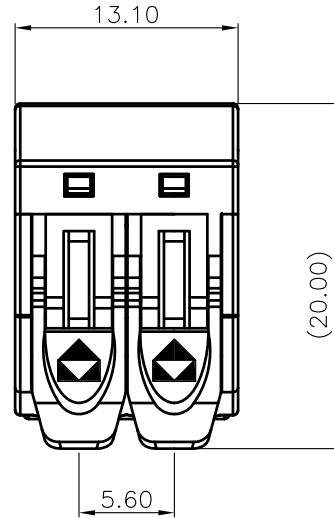


REVISION RECORD

REV	ECN	DESCRIPTION	DRFT	DATE
-----	-----	-------------	------	------

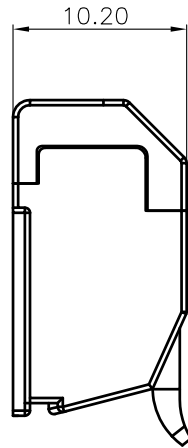

NOTES1:

- UL Standard
- 1.Rated voltage : 600V
- 2.Wire range : 24~12AWG

IEC Standard

- 1.Rated voltage/current : 450V / 32A
- 2.Wire range : 0.2~4.0mm²

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 5.6mm, Poles : 02P
- 3.Stripping length : 12mm
- 4.Withstanding voltage : AC2500V/1Min
- 5.Operating temperature : -40°C~+85°C
- 6.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm				0.1/10
To	Over	To	Over	To	Over	
6	10	30	60	100	150	±2'
±0.15	±0.20	±0.30	±0.50	±0.70	±1.00	

7.RoHS Compliance

- 8.Mark "DG221-5.6-02P": 600V Cu
24-12AWG sol&str

DG221 - 5.6 - 02P - 1Y - 00A (H)

(Series No.) (Pitch) (Poles) (Single Pitch) (Color): 1.(Grey) 2.(Blue) 3.(Black)
4.(Green) 5.(Orange)
6.(Red) 7.(Transparent)
8.(Yellow) 9.(White)

(RoHS)
00A-(Standard)

DETACHED LISTS	PART NO.:	/			宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
	APPD:	/				NAME:	
	CHKD:	/			DG221-5.6-02P-1Y-00A(H)		
	DRFT:	/			TITLE: CUSTOMER DRAWING	REV	D0
THIRD ANGLE PROJECTION		DRAWING NO.:		/		SHEET	1/1
		MM (INCH)		DO NOT SCALE DRAWING		SCALE	1:1