




宁波速普电子有限公司

NINGBO SUPU ELECTRONICS.CO.,LTD

产品规格书

Product Specification

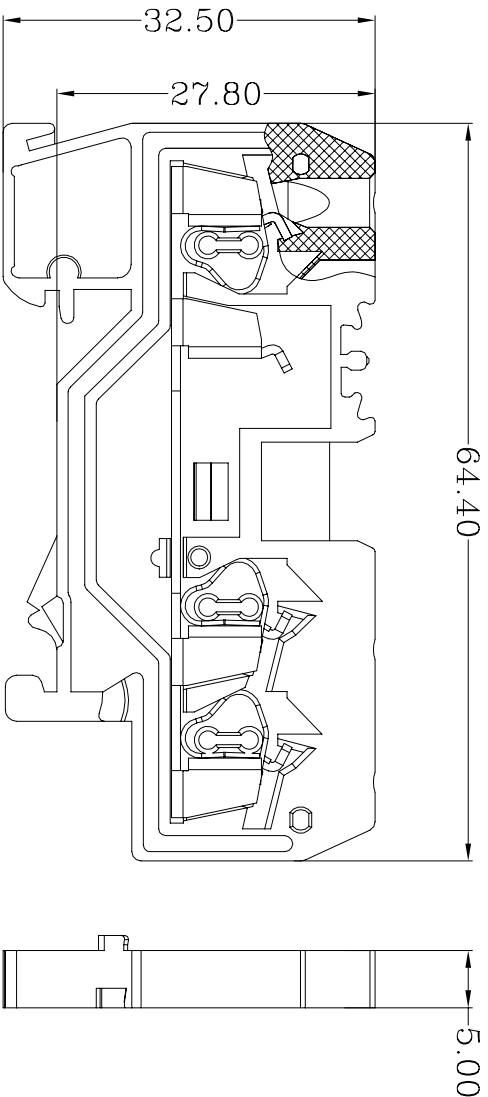

IEC 额定数据/IEC Rated data

接线范围/Wire range	0.2-2.5mm ²
单股导线/Solid	0.2-2.5mm ²
软导线/Stranded	0.2-2.5mm ²
带端头软导线/Stranded with ferrules without plastic sleeve	0.2-1.5mm ²
带预绝缘端头软导线/Stranded with ferrules with plastic sleeve	0.2-1.5mm ²
剥线长度/Strip length	8-9mm
额定电压/Rated voltage	800V
额定电流/Rated current	24A
额定脉冲耐受电压/Rated surge voltage	8KV
污染等级/Pollution degree	3
过电压类别/Surge voltage category	III
UL 额定数据/UL Rated data	B C D
额定电流/Rated current	20A 20A
额定电压/Rated voltage	600V 600V
接线范围/Wire range	28-14AWG

其他信息/Other information

塑件/Housing	PA66
触点材料/Contact	铜合金/Copper alloy
镀层/Coating	锡/Tin
阻燃等级/Flame retardant rating	V0
使用环境温度/Usage ambient temperature	-25℃ - +70℃
储存及运输环境温度/Storage ambient temperature	-40℃ - +85℃
导轨尺寸/rails Size	SP35X7.5/SP35X15

认证/Approval



订货信息 Order Info

订货号 PART NUMBER	颜色 COLOR
225951	灰色 Gray
225952	橙色 Orange
225953	红色 Red
225954	蓝色 Blue
225955	黄色 Yellow

未注尺寸公差:

Pitch mm	Range		In mm	Nominal Dimension		Range		Tolerance
	Over	TO		Over	TO	Over	TO	
6	6	10	6	30	60	100	150	0.1/0
10	10	24	10	30	60	100	150	±
±0.15	±0.20	±0.30	±0.30	±0.50	±0.50	±0.70	±1.00	±2°

Rev. 01	Name	22595X 3通道正面接线端子 22595X 3conductor through terminal blocks with of front-entry
单位/Unit	mm	