


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE



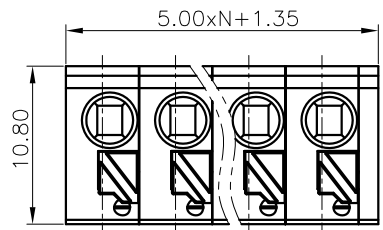


NOTES1:
 UL Standard
 1.Rated voltage/current : 300V / 8A
 2.Wire range : 20~16AWG
 IEC Standard
 1.Rated voltage/current : 400V / 10A
 2.Wire range : 1.5mm²


NOTES2:
 1.Dimension shall be interpreted per ASME Y14.5-2009
 2.Pitch : 5.00mm, Poles : N=01~XXP
 3.Stripping length : 8-9mm
 4.Withstanding voltage : AC2500V/1Min.
 5.Operating temperature : -40°C~+105°C
 6.Undimensioned tolerances:

Pitch range in mm		Nominal dimension range in mm					Tolerances	
TO	6 TO	Over 10 TO	Over 30 TO	Over 60 TO	Over 100 TO	Over 150 TO	0.1/10	∠
6	10	24	30	60	100	150	<	
±0.15 ±0.20 ±0.30 ±0.30 ±0.50 ±0.70 ±1.00 ±1.30							±2'	

7.RoHS Compliance

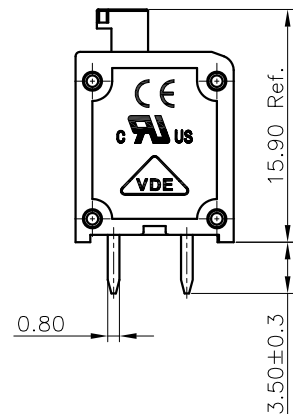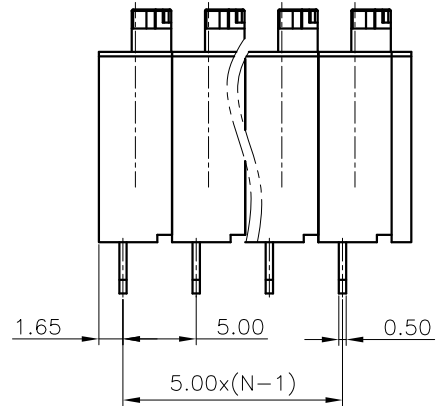

DG236 - 5.0 - XXP - 1Y - 00A (H)
 (Series No.) (Pitch) (Poles) (Single Pitch) (Color):1.(Grey)
 2.(Blue)
 3.(Black)
 4.(Green)
 5.(Orange)
 6.(Red)
 7.(Transparent)
 8.(Yellow)
 9.(White)

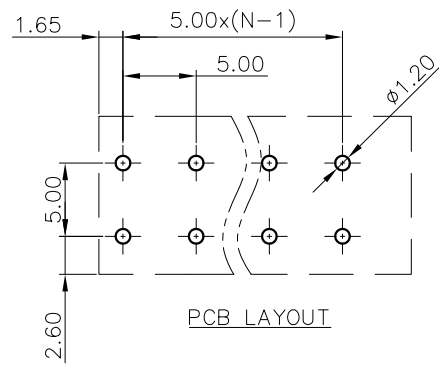

DETACHED LISTS	PART NO.:	NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	NAME: DG236-5.0-XXP-1Y-00A(H)			
	CHKD:	TITLE: CUSTOMER DRAWING			
	DRFT:	DRAWING NO.:		REV	DO
THIRD ANGLE PROJECTION		MM (INCH)	DO NOT SCALE DRAWING	SHEET	1/1
			SCALE	1:1	