


### Screw clamping terminal block--UKJ-6/5 × 6- 011319



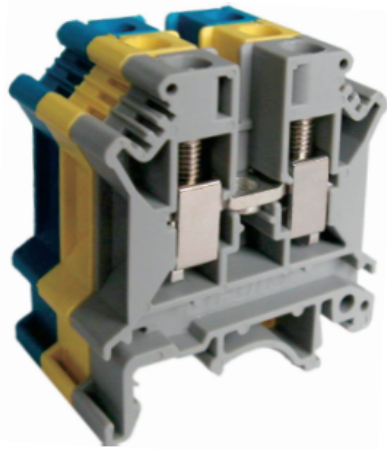


Screw clamping terminal block , rated voltage:800V , Max. operating current:57A, connection method : screw connection , number of connections : 6 , crimping range : 0.2mm<sup>2</sup> -10mm<sup>2</sup> , thickness:24.6mm , height:46.5mm , color : grey、 yellow、 blue , mounting type : TH35-7.5、 TH35-15、 G32-15、 G32-18

### Product parameter

Parameter	Data
Packing unit (PCS)	/
NW per piece(g)	/
Layers	1
Number of connections	4
Rated cross section(mm <sup>2</sup> )	10
Color	grey、 yellow、 blue
Insulation material	PA
Flame retardant grade ( UL94 )	V0
Rated voltage(V)	800
Rated current(A)	57
Temperature of insulation material	-40 ~ +125
Wire feed	Both sides of the terminal

### Product certification

Parameter	Data
Certification logo	
Certification logo	

Parameter	Data
	
Certification logo	<b>IECE<sub>x</sub></b>
Certification logo	
Certification logo	<b>RoHS</b>

## Technical data

Parameter	Data
Connection Method	Screw connection
Screw thread	M4
Stripping length(mm)	10
Tightening torque	1.5-1.8
Solid conductors(mm <sup>2</sup> )	0.2-10
Stranded conductors(mm <sup>2</sup> )	0.2-6
Operating temperature ( )	-40 ~ +105
Ambient temperature (storage/transportation) ( )	-25 ~ +60
Relative humidity	30% ~ 90%
Connection in acc. with standard	IEC 60947-7-1

## Dimension

Parameter	Data
Width(mm)	42.5
Thickness(mm)	24.6
Height(mm)	46.5