


Spring-cage connection terminal block-
UJ5-2.5/2 × 2SK - 421038

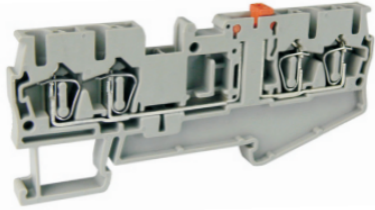

Spring-cage connection terminal block , rated voltage:400V , Max. operating current:16A, connection method:spring-cage connection, number of connection : 4 , crimping range : 0.2 mm² -4mm² , AWG : 24-12 , thickness:5.2mm , height:36.8mm , color : grey , mounting type : TH35-7.5、 TH35-15

Product parameter

| Parameter | Data |
|---------------------------------------|--------------------|
| Packing unit (PCS) | 70 |
| NW per piece(g) | 10.94 |
| Layers | 1 |
| Number of connections | 4 |
| Rated cross section(mm ²) | 2.5 |
| Color | grey |
| Insulation material | PA |
| Flame retardant grade (UL94) | V0 |
| Rated voltage(V) | 400 |
| Rated current(A) | 16 |
| Temperature of insulation material | -40 ~ +125 |
| Wire feed | Above the terminal |

Product certification

| Parameter | Data |
|--------------------|-------------|
| Certification logo | CE |
| Certification logo | RoHS |

Technical data

| Parameter | Data |
|-----------|------|
|-----------|------|

| Parameter | Data |
|---|------------------------|
| Connection Method | Spring-cage connection |
| Stripping length(mm) | 10 |
| Solid conductors(mm ²) | 0.2-4 |
| Solid conductors AWG | 24-12 |
| Stranded conductors(mm ²) | 0.2-2.5 |
| Stranded conductors AWG | 24-12 |
| Operating temperature () | -40 ~ +105 |
| Ambient temperature (storage/transportation) () | -25 ~ +60 |
| Relative humidity | 30% ~ 90% |
| Connection in acc. with standard | IEC 60947-7-1 |

Dimension

| Parameter | Data |
|---------------|------|
| Width(mm) | 84 |
| Thickness(mm) | 5.2 |
| Height(mm) | 36.8 |