


Screw clamping terminal block-  
UKJ-6MJD- 011055

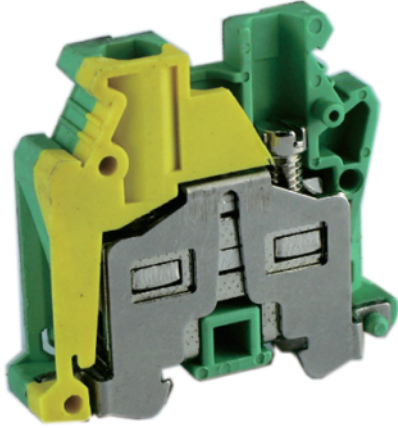

Screw clamping terminal block, connection method : screw connection , number of connections : 2 , crimping range : 0.5mm<sup>2</sup> -10mm<sup>2</sup> , thickness:8.2mm , height:34.4mm , color : yellow-green , mounting type : TH15-5.5

Product parameter

Parameter	Data
Packing unit (PCS)	120
NW per piece(g)	1.3
Layers	1
Number of connections	2
Rated cross section(mm <sup>2</sup> )	10
Color	yellow-green
Insulation material	PA
Flame retardant grade ( UL94 )	V0
Temperature of insulation material	-40 ~ +125
Wire feed	Both sides of the terminal

Product certification

Parameter	Data
Certification logo	<b>CE</b>
Certification logo	<b>RoHS</b>

## Technical data

Parameter	Data
Connection Method	Screw connection
Screw thread	M4
Stripping length(mm)	10
Tightening torque	1.5-1.8
Solid conductors(mm <sup>2</sup> )	0.5-10
Stranded conductors(mm <sup>2</sup> )	0.5-6
Operating temperature ( )	-40 ~ +105
Ambient temperature (storage/transportation) ( )	-25 ~ +60
Relative humidity	30% ~ 90%
Connection in acc. with standard	IEC 60947-7-1

## Dimension

Parameter	Data
Width(mm)	39
Thickness(mm)	8.2
Height(mm)	34.4