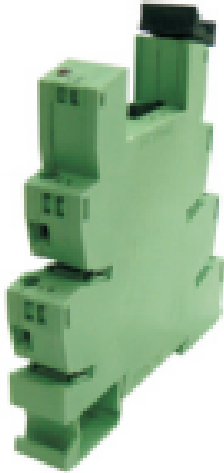


Relay module-Base UDK-PLC-ZI-328021

Relay coupling-base, voltage input: 12V, current input:/, connection methods: screw connection, pollution degree:2, AWG:26-14, current output:/, width 80mm, thickness 6.2mm, color: grey, mounting rail: TH35-7.5, G32-15

Product parameter

Parameter	Data
Packing unit(pcs)	/
NW per piece(g)	/
Cross section(mm ²)	0.14-2.5
Color	grey
Materials	PA66
Flame retardant rating	V0
Voltage input(V)	12V
Current input(mA)	/
Insulation material temperature	-40℃~+125℃
Connection methods	screw connection

Product certification

Parameter	Data
Certification logo	

Technical data

Parameter	Data
-----------	------

Parameter	Data
Connection methods	screw connection
Current output (A)	/
Upper switching voltage (V)	/
Rated power(W)	/
Coils/contacts	4000V
Contact material	/
Resistive load	/
Ambient temperature (°C)	-25°C~+60°C
Storage temperature (Storage/transportation) (°C)	-30°C~+80°C
Relative humidity	5%~85%
Connection in acc. with standard	IEC 60947-5-1
Pollution degree	2

Dimension

Parameter	Data
Width(mm)	80
Thickness(mm)	6.2
Height(mm)	94