


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

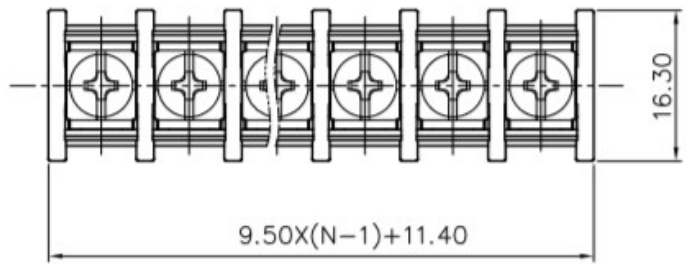

NOTES1:  
 UL Standard  
 1. Rated voltage/current : 300V / 25A  
 2. Torque value : M4 , 10.53lb.in  
 3. Wire range : 22~12AWG


NOTES2:  
 1. Dimension shall be interpreted per ASME Y14.5-2009  
 2. Pitch : 9.50mm, Poles : N=02~24P  
 3. Withstanding voltage : AC1600V/1Min  
 4. Operating temperature: -40°C~+105°C  
 5. Undimensioned tolerances:

Pitch range in mm	Nominal dimension range in mm							0.1/10	
	Over 6 TO 6	Over 10 TO 10	Over 10 TO 24	Over 30 TO 30	Over 60 TO 60	Over 100 TO 100	Over 150 TO 150		
	±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30	±2'

6. RoHS Compliance




0.80±0.05

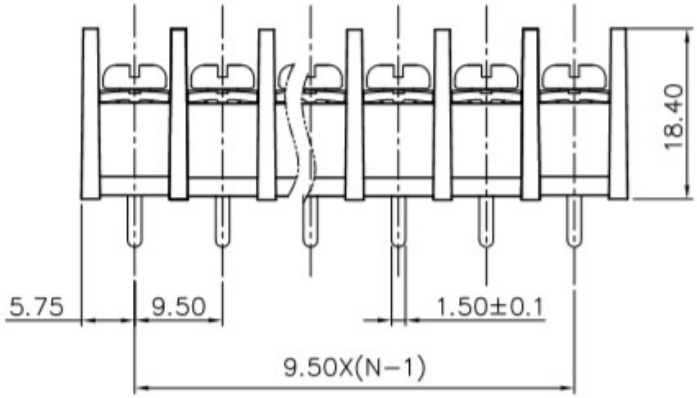

5.20±0.30

DG45C-B - XXP - 1Y - 00A (H)  
 (Series No.) (Poles) (Single Pitch) (Color) : 1.(Grey)  
 2.(Blue)  
 3.(Black)  
 4.(Green)  
 5.(Orange)  
 6.(Red)  
 7.(Transparent)  
 8.(Yellow)  
 9.(White)  
 (RoHS)  
 00A-(Standard)

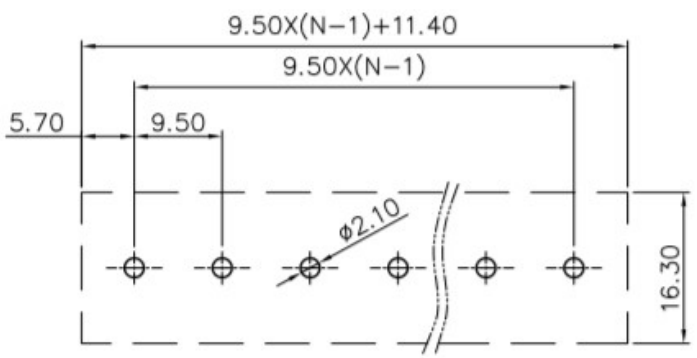

PCB LAYOUT

DETACHED LISTS	PART NO.:	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
	APPD:	NAME: DG45C-B-XXP-1Y-00A(H)			
	CHKD:	TITLE: CUSTOMER DRAWING			
	DRFT:	DRAWING NO.:		REV	DO
	THIRD ANGLE PROJECTION		DRAWING NO.: MM (INCH)	SHEET	1/1
		DO NOT SCALE DRAWING	SCALE	1:1	