
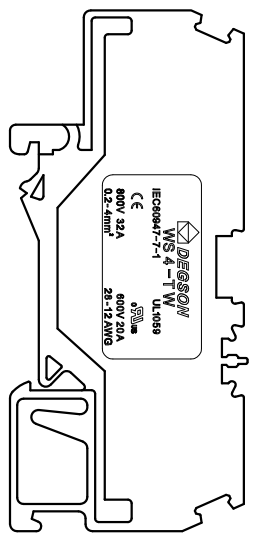

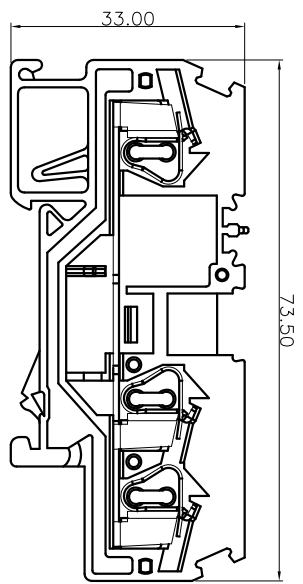


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE



Pollution degree	3
Overvoltage category	III
Rate impulse voltage(KV)	8.0KV
Rate voltage(V)	800V
Rate current(A)	32 A

- NOTES:
- UL Standard
  - Rated voltage/current : 600V / 20A
  - Withstanding voltage : AC2200V/1Min.
  - Wire range : 28~12AWG
  - IEC Standard


1. Pollution degree

NOTES2:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Pitch : 6.0mm, Poles : 01P
- 3.Stripping length : 11~12mm
- 4.Operating temperature: -40°C~+105°C
- 5.Undimensioned tolerances:

Pitch range	in mm	Nominal dimension	range	in mm	±	Δ
Over	6	TO	Over	30	TO	Over
TO	10	TO	TO	60	TO	150
6	10	24	30	60	100	150
±0.15 ±0.20 ±0.30		±0.30 ±0.50 ±0.70		±1.00 ±1.30		±2°

6.RoHS Compliance

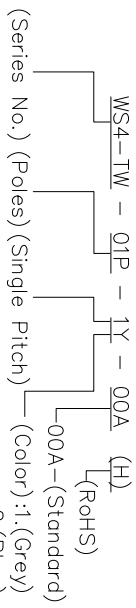

- 00A-(Standard)
- (RoHS)

DETACHED LISTS	
PART NO.:	/
APPD:	/
CHKD:	/
DRFT:	/
THIRD ANGLE PROJECTION	
NAME:	<b>DEGSON</b> 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD
TITLE:	CUSTOMER DRAWING
DRAWING NO.:	/
DO NOT SCALE DRAWING	SCALE
REV	DO
SHEET	1/1
SCALE	1:1