


Screw clamping terminal block-
UKJ-2.5/1 × 2- 011039





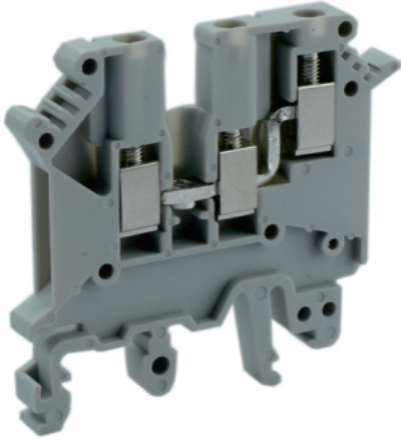

Screw clamping terminal block , rated voltage:400V , Max. operating current:24A, connection method : screw connection , number of connections : 3 , crimping range : 0.2mm² -2.5mm² , thickness:5.2mm , height:47mm , color : grey , mounting type : TH35-7.5、 TH35-15、 G32-15、 G32-18

Product parameter

Parameter	Data
Packing unit (PCS)	80
NW per piece(g)	0.83
Layers	2
Number of connections	3
Rated cross section(mm ²)	4
Color	grey
Insulation material	PA
Flame retardant grade (UL94)	V0
Rated voltage(V)	400
Rated current(A)	24
Temperature of insulation material	-40 ~ +125
Wire feed	Both sides of the terminal

Product certification

Parameter	Data
Certification logo	
Certification logo	

Parameter	Data
	
Certification logo	
Certification logo	CCS
Certification logo	IECE_x
Certification logo	cRU[®] US
Certification logo	
Certification logo	RoHS

Technical data

Parameter	Data
Connection Method	Screw connection
Screw thread	M3
Stripping length(mm)	8mm
Tightening torque	0.6-0.8Nm
Solid conductors(mm ²)	0.2-2.5
Stranded conductors(mm ²)	0.2-2.5

Parameter	Data
Operating temperature ()	-40 ~ +105
Ambient temperature (storage/transportation) ()	-25 ~ +60
Relative humidity	30% ~ 90%
Connection in acc. with standard	IEC 60947-7-1

Dimension

Parameter	Data
Width(mm)	50.5
Thickness(mm)	5.2
Height(mm)	47