



尺寸 Size: 210mmx210mmx70mm
 风量 Airflow: 644-683m³/hr
 379-402CFM
 重量 Weight: 1700g
 噪音 Noise: 70-75dBA
 风叶 Impeller Material: PP UL94V-0 Reinforcee Plastic
 外框 Frame: Aluminum Alloy
 端子 Terminals: 0.5mm
 引线 Lead Wire: AWG#24 UL 1332(Optional)
 马达 Motor: Capacitor-Run Induction Motor
 温度范围 Operating Temperature: -10°C~+65°C

Model (型号)	Bearing System (轴承型式)	Voltage VAC (电压)	Freq. Hz (频率)	Current A (电流)	Power W (功率)	Speed RPM (转速)	Noise dBA (噪音)	Air Flow (风量)		Phase (相数)	Capacitor (电容)
								M3/hr	CFM		
G21070HA ₁ -C	Ball	100/125	50/60	0.6	55	2550/3000	70/75	644/683	379/402	1	3.0uf/250v
G21070HA ₂ -C	Ball	200/240	50/60	0.2/0.25	45/55	2550/3000	70/75	644/683	379/402	1	1.0uf/500v
G21070HA ₃	Ball	380/420	50/60	0.1	55	2550/3000	70/75	644/683	379/402	3	—
G21070HA ₄ -C	Ball	380/420	50/60	0.1	55	2550/3000	70/75	644/683	379/402	1	1.0uf/630v

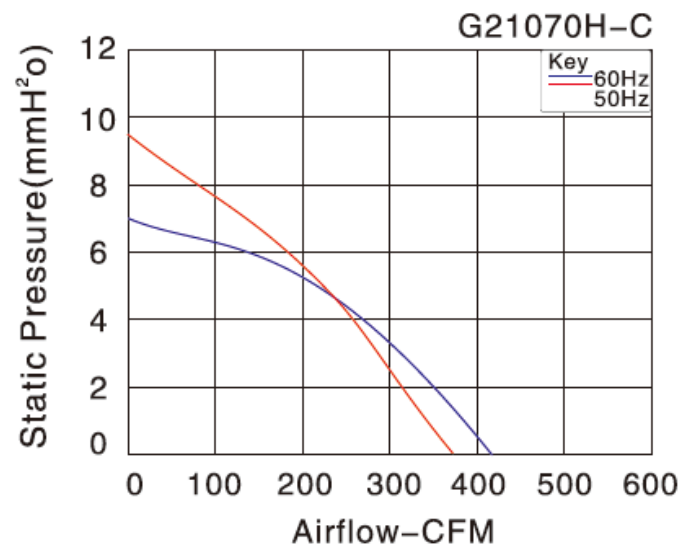

Fan Accessories



JL-200FOR



JULONG MOTOR
AC DC FANS COOLING FANS



36

如欲知电压也可提供详细资料，本公司保留技术机密权利。
 Special Voltage may be provided if necessary according to the inquiry. All technical modification rights reserved.
[Http://www.xtgygs.cn](http://www.xtgygs.cn)