


Spring-cage connection terminal block-  
UJ5-1.5/2-2JD - 421024



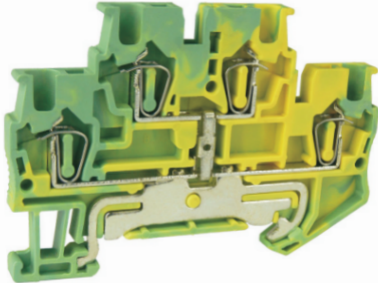

Spring-cage connection terminal block , rated voltage:/, Max. operating current:/, connection method:spring-cage connection, number of connection : 4 , crimping range : 0.14mm<sup>2</sup> -1.5 mm<sup>2</sup> , AWG : 28-14 , thickness:4.2mm , height:45.8mm , color : yellow-green , mounting type : TH35-7.5、 TH35-15

## Product parameter

Parameter	Data
Packing unit (PCS)	70
NW per piece(g)	12.1
Layers	2
Number of connections	4
Rated cross section(mm <sup>2</sup> )	1.5
Color	yellow-green
Insulation material	PA
Flame retardant grade ( UL94 )	V0
Rated voltage(V)	/
Rated current(A)	/
Temperature of insulation material	-40 ~ +125
Wire feed	Above the terminal

## Product certification

Parameter	Data
Certification logo	
Certification logo	
Certification logo	

Parameter	Data
	<b>CCS</b>
Certification logo	<b>c UL<sup>®</sup> US</b>
Certification logo	<b>RoHS</b>

## Technical data

Parameter	Data
Connection Method	Spring-cage connection
Stripping length(mm)	10
Solid conductors(mm <sup>2</sup> )	0.14-1.5
Solid conductors AWG	28-14
Stranded conductors(mm <sup>2</sup> )	0.14-1.5
Stranded conductors AWG	28-14
Operating temperature ( )	-40 ~ +105
Ambient temperature (storage/transportation) ( )	-25 ~ +60
Relative humidity	30% ~ 90%
Connection in acc. with standard	IEC 60947-7-1

## Dimension

Parameter	Data
Width(mm)	67.5
Thickness(mm)	4.2
Height(mm)	45.8