

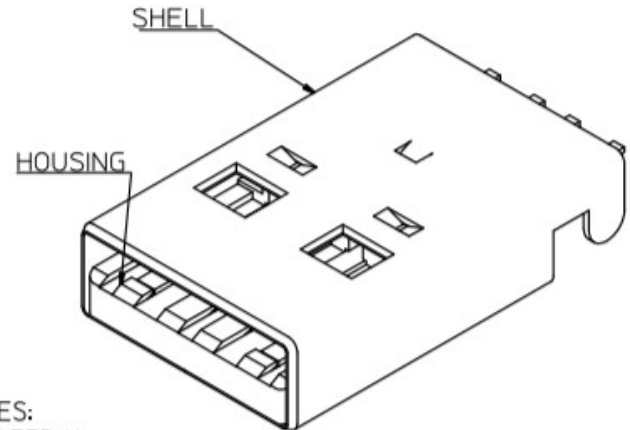
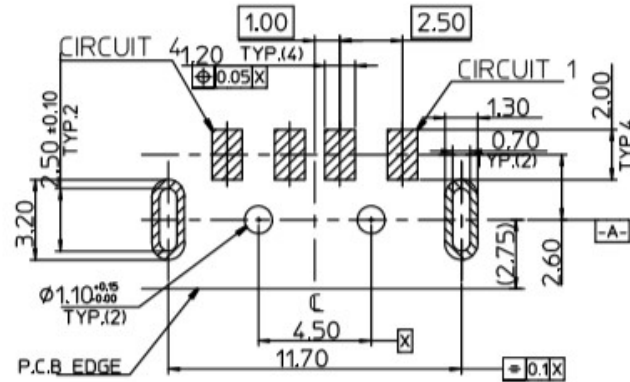
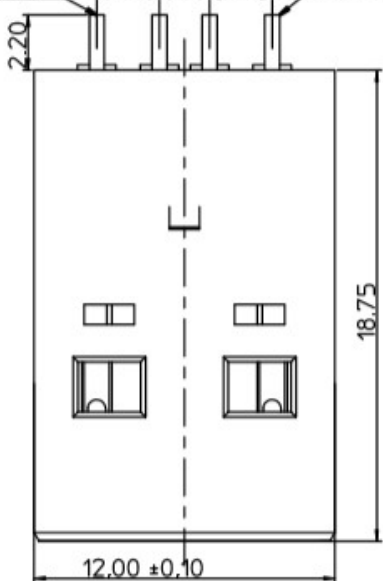
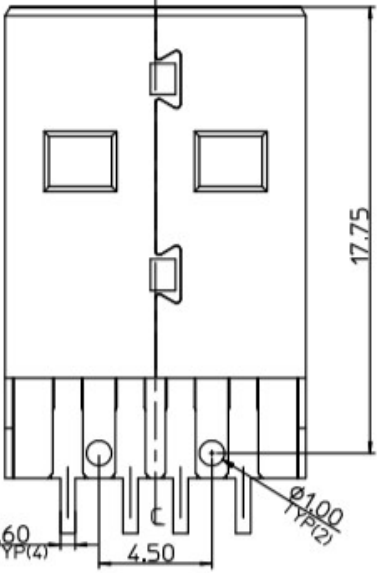


CIRCUIT 4 2.50 2.00 2.48 CIRCUIT 1

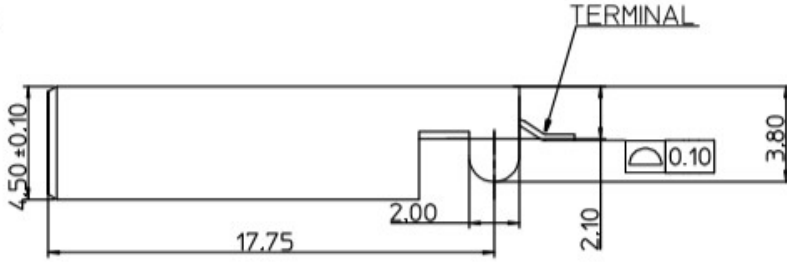

- NOTES:
- MATERIAL:
HOUSING: LCP, GLASS FIBER FILLED, UL94V-0, COLOR: BLACK.
TERMINAL: BRASS
METAL SHELL: COLD ROLL STEEL,
 - FINISH:
TERMINAL:
SELECTIVE GOLD(Au) IN CONTACT AREA
THICKNESS=30 MICROINCH MINIMUM.
SELECTIVE TIN(Sn), ALLOY IN SOLDER TAIL AREA
THICKNESS=120 MICROINCH MINIMUM.
UNDER PLATED: NICKEL(Ni), THICKNESS=50 MICROINCH MINIMUM.
METAL SHELL:
NICKEL(Ni), OVERALL
UNDER PLATE: COPPER(Cu), OVERALL
THICKNESS=50 MICROINCH MINIMUM.
 - RECOMMENDED PCB THICKNESS: 1.60 ± 0.05mm
 - PRODUCT SPECIFICATION: REFERS TO PS-48037-001
 - PACKAGE SPECIFICATION REFERS TO PK-48037-210
 - TEST SUMMARY REFERS TO TS-48037-001
 - COPLANARITY TO BE 0.1mm MAX.
 - LEAD FREE AND ROHS COMPLIANCE.
 - DATE CODE: X X X X X
 YEAR WEEK DAY



| | | | | | | | |
|---|--|---|--|---|--|---|--|
| REVISE EC NO: SH2016-0141 DRWN: F YANG05 2015/10/30 CHK'D: APPR: RZHANG 2015/11/05 REV D | QUALITY SYMBOLS F/A=0 F/E=0 F/P=0 | GENERAL TOLERANCES (UNLESS SPECIFIED) | | DIMENSION STYLE MM ONLY | | SCALE 1:1 | DESIGN UNITS THIRD ANGLE PROJECTION |
| | | 4 PLACES ± --- ± --- 3 PLACES ± --- ± --- 2 PLACES ± 0.25 ± --- 1 PLACE ± 0.25 ± --- | | DRAWN BY DATE TOM 2005/02/15 | | TITLE USB A TYPE PLUG SMT STR SHELL LEG(3.8MM) (LEAD-FREE VERSION) | |
| | | ANGULAR ± 3° | | APPROVED BY DATE ALLEN 2005/02/15 | | MOLEX MOLEX INCORPORATED | |
| | | DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS | | MATERIAL NO. 48037-2200 | | DOCUMENT NO. SD-48037-004 | |
| | | SIZE A3 | | THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION | | | |