




宁波速普电子有限公司

NINGBO SUPU ELECTRONICS.CO.,LTD

产品规格书
Product Specification

IEC 额定数据/IEC Rated data

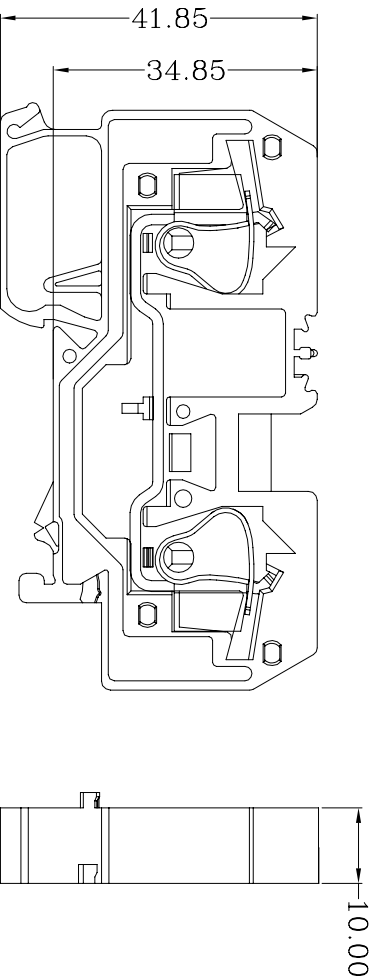

未注尺寸公差

Pitch mm	Range		In mm	Nominal Dimension						Range	Tolerance			
	Over	To		30	60	100	150	Over	To		±			
6	TO	10	30	60	100	150	±0.15	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±2°

订货信息		Order Info	
订货号	颜色	PART NUMBER	COLOR
210921	灰色 Gray	210922	橙色 Orange
210923	蓝色 Blue		

IEC 额定数据/IEC Rated data

接线范围/Wire range	0.2-10mm ²
单股导线/Solid	0.2-10mm ²
软导线/Stranded	0.2-10mm ²
带端头软导线/Stranded with ferrules without plastic sleeve	0.2-6mm ²
带预绝缘端头软导线/Stranded with ferrules with plastic sleeve	0.2-6mm ²
剥线长度/Strip length	12-13mm
额定电压/Rated voltage	800V
额定电流/Rated current	57A
额定脉冲耐受电压/Rated surge voltage	8KV
污染等级/Pollution degree	3
过电压类别/Surge voltage category	III
UL 额定数据/UL Rated data	B C D
额定电流/Rated current	50A 50A
额定电压/Rated voltage	600V 600V
接线范围/Wire range	24-8AWG
其他信息/Other information	
塑件/Housing	PA66
触点材料/Contact	铜合金/Copper alloy
镀层/Coating	锡/Tin
阻燃等级/Flame retardant rating	V0
使用环境温度/Usage ambient temperature	-25℃ - +70℃
储存及运输环境温度/Storage ambient temperature	-40℃ - +85℃
导轨尺寸/rails Size	SP35X7.5/SP35X15

认证/Approval



单位/unit	mm	Rev.	Name
		01	21092X 2-通道正面接线端子 21092X 2-conductor through terminal blocks of front-entry