


PCB LAYOUT
(TOP VIEW)

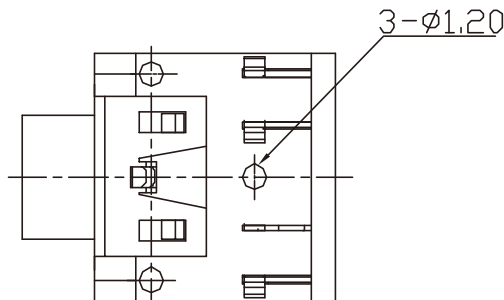

Specification:

Contact Resistance: 30m Ohm. Max. At AC 100mA Max. 1KHz

Insulation Resistance: 100M Ohm Min. At 500V DC.

Rated Voltage And Current: DC 12V, 2A Max ; AC 100V, 1A Max.

Dielectric Withstanding Voltage: 500V AC For 1 Minute.

Durability (Life Test):

A: For Phosphor Bronze 1500 Cycles Minimum.


B: For PBS 2000 Cycles Minimum.

Insertion Force: 0.3-3.0 Kg.

Extraction Force: 0.3-3.0Kg.

NO.	NAME	MATERIAL	FINISH	Q'TY
1	PIN 1	C.R.S. 0.50	TIN PLATED	1
2	PIN 2	PHOS.BRONZE 0.25	TIN PLATED	1
3	PIN 3	PHOS.BRONZE 0.25	SILVER PLATED	1
4	PIN 4	PHOS.BRONZE 0.25	SILVER PLATED	1
5	PIN 5	PHOS.BRONZE 0.30	TIN PLATED	1
6	BUSHING	BRASS	NICKEL PLATED	1
7	HOUSING	NYLON PA66	SEE COLOR	1
8	BACK COVER	PBT G.F.	SEE COLOR	1
9	SPRING WIRE	BRASS	SILVER PLATED	1
10	TUBE	PBT G.F.	SEE COLOR	1

NO.	PJ-R35xx-05CA <PC99 COLOR>	PANTONE
PK	PINK	701C
BK	BLACK	
LM	LIME	577C
YL	YELLOW	123C
OR	ORANGE	157C
LB	LIGHT BLUE	284C



RoHS Compliant

TOLERANCES ARE



煜倫股份有限公司

www.morethanall.com

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4 PROJECTION

X, ±
.X ±
.XX ±
.XXX ±
ANG ±

照片框

ORDER INFORMATION

PJ-R35xx-05CAZ-LF



DESCRIPTION: 3.5mm EARPHONE JACK AZALIA FLAT 5 PIN DIP