

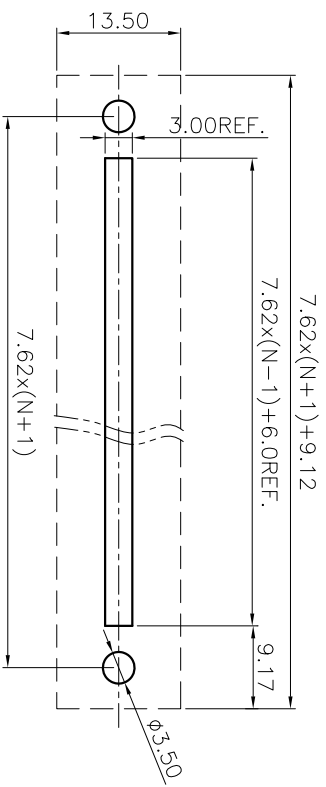
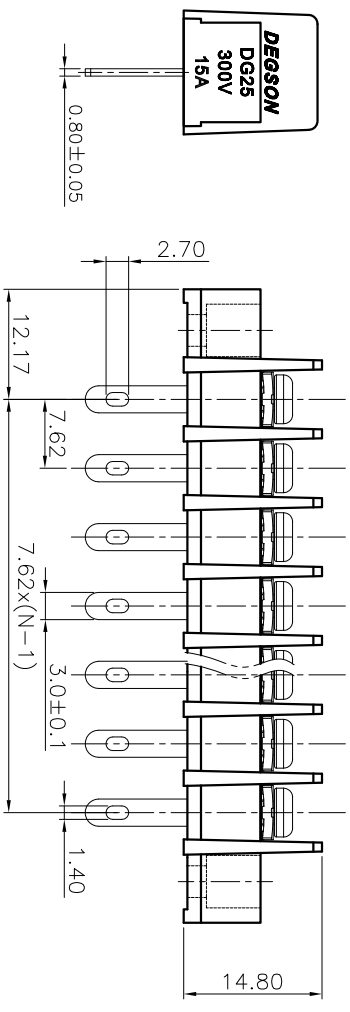



| REVISION RECORD |     |             |           |
|-----------------|-----|-------------|-----------|
| REV             | ECN | DESCRIPTION | DRFT DATE |
|                 |     |             |           |

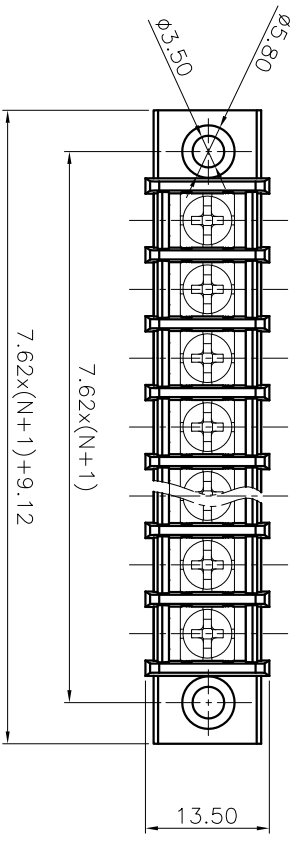

- NOTES1:  
UL Standard  
1. Rated voltage/current : 300V / 15A  
2. Torque value : M3 , 4.43Lb.in  
3. Wire range : 22~14AWG
- NOTES2:  
1. Dimension shall be interpreted per ASME Y14.5-2009  
2. Pitch : 7.62mm, Poles : N=02~24P  
3. Withstanding voltage : AC1600V/1Min  
4. Operating temperature: -40°C~+105°C  
5. Undimensioned tolerances:

| Pitch range | in    | mm    | Over  | Over  | Over  | Over  | Over  | Over  | Over |
|-------------|-------|-------|-------|-------|-------|-------|-------|-------|------|
| TO          | 6     | 10    | TO    | 30    | 60    | 100   | 150   | 0.1/0 |      |
| TO          | 10    | 24    | TO    | 30    | 60    | 100   | 150   | <     |      |
| ±0.15       | ±0.20 | ±0.30 | ±0.30 | ±0.50 | ±0.70 | ±1.00 | ±1.30 | ±2°   |      |

6. RoHS Compliance

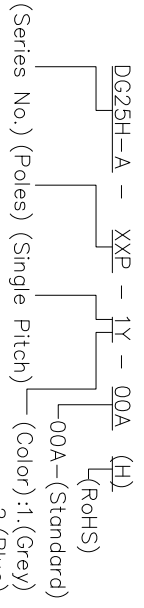

- (Series No.) (Poles) (Single Pitch) (Color) : 1.(Grey)  
2.(Blue)  
3.(Black)  
4.(Green)  
5.(Orange)  
6.(Red)  
7.(Transparent)  
8.(Yellow)  
9.(White)

| DETACHED LISTS         |   |
|------------------------|---|
| PART NO.:              | /   |
| APPD:                  | /   |
| CHKD:                  | /   |
| DRFT:                  | /   |
| THIRD ANGLE PROJECTION |   |
| NAME:                  | <b>DEGSON</b> 宁波高松电子有限公司<br>NINGBO DEGSON ELECTRICAL CO., LTD |
| TITLE:                 | CUSTOMER DRAWING  |
| DRAWING NO.:           | /   |
| REV                    | DO  |
| SHEET                  | 1/1   |
| SCALE                  | 1:1   |

A B C D E F G H

8

7

6

5

4

3

2

1

A B C D E F G H