
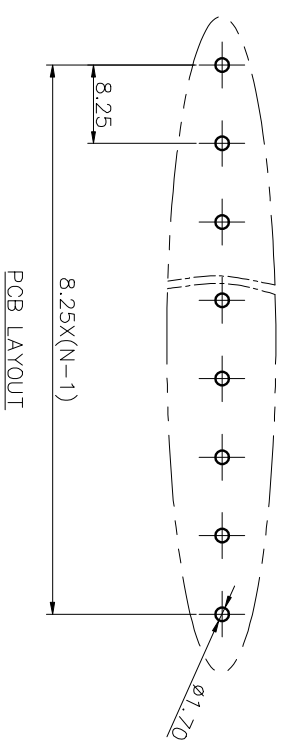

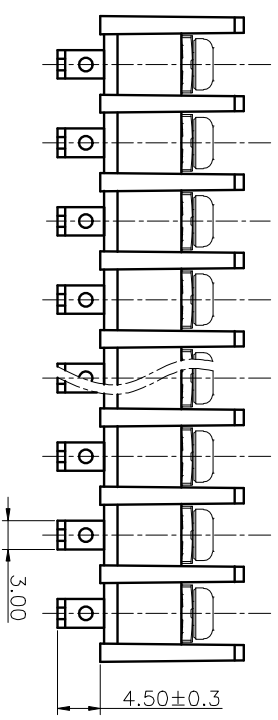


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

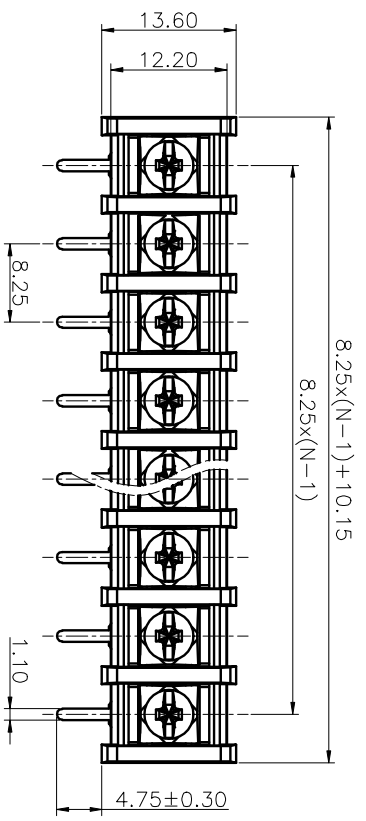

Pitch range	in	mm	Nominal dimension	range	in	mm
Over	6	10	Over	30	60	100
TO	10	24	TO	60	100	150
6	10	30	60	100	150	±2
±0.15 ±0.20 ±0.30 ±0.30 ±0.50 ±0.70 ±1.00 ±1.30						

6.RoHS Compliance

- NOTES1:
- 1. Rated voltage/current : 300V / 20A
  - 2. Torque value : M3 , 4.43lb.in
  - 3. Wire range : 22~12AWG
- NOTES2:
- 1.Dimension shall be interpreted per ASME Y14.5-2009
  - 2.Pitch : 8.25mm, Poles : N=02~26P
  - 3.Withstanding voltage : AC1600V/1Min
  - 4.Operating temperature : -40°C~+105°C
  - 5.Undimensioned tolerances:

DG35R-B - XXP - 1Y - 00A (H)  
 (RoHS)  
 (Series No.) (Poles) (Single Pitch) (Color) : 1. (Grey)  
 2. (Blue)  
 3. (Black)  
 4. (Green)  
 5. (Orange)  
 6. (Red)  
 7. (Transparent)  
 8. (Yellow)  
 9. (White)

PART NO.:		/	
APPD:	/	NAME:	<b>DEGSON</b> 宁波德森电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD
CHKD:	/	TITLE:	CUSTOMER DRAWING
DRFT:	/	DRAWING NO.:	/
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	SCALE
		SCALE	1:1