


## Spring-cage connection terminal block- UJ5-6CW/RDX-421145



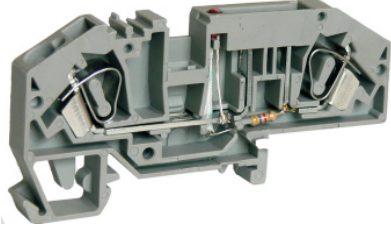

Spring-cage connection terminal block , rated voltage:400(rated voltage depends on LED indicator light), Max. operating current:30 ( rated current depends on fuse ) , connection method:spring-cage connection, number of connection : 2 , crimping range : 0.5mm<sup>2</sup> -10mm<sup>2</sup> , AWG : 24-8 , thickness:8mm , height:39.2mm , color : grey , mounting type : TH35-7.5、 TH35-15

## Product parameter

Parameter	Data
Packing unit (PCS)	46
NW per piece(g)	18
Layers	1
Number of connections	2
Rated cross section(mm <sup>2</sup> )	6
Color	grey
Insulation material	PA
Flame retardant grade ( UL94 )	V0
Rated voltage(V)	400(rated voltage depends on LED indicator light)
Rated current(A)	30 ( rated current depends on fuse )
Temperature of insulation material	-40 ~ +125
Wire feed	Above the terminal

## Product certification

Parameter	Data
Certification logo	
Certification logo	

## Technical data

Parameter	Data
-----------	------

Parameter	Data
Connection Method	Spring-cage connection
Stripping length(mm)	13
Solid conductors(mm <sup>2</sup> )	0.5-10
Solid conductors AWG	20-8
Stranded conductors(mm <sup>2</sup> )	0.5-6
Stranded conductors AWG	20-8
Operating temperature ( )	-40 ~ +105
Ambient temperature (storage/transportation) ( )	-25 ~ +60
Relative humidity	30% ~ 90%
Connection in acc. with standard	IEC 60947-7-1

## Dimension

Parameter	Data
Width(mm)	84.5
Thickness(mm)	8
Height(mm)	39.2