

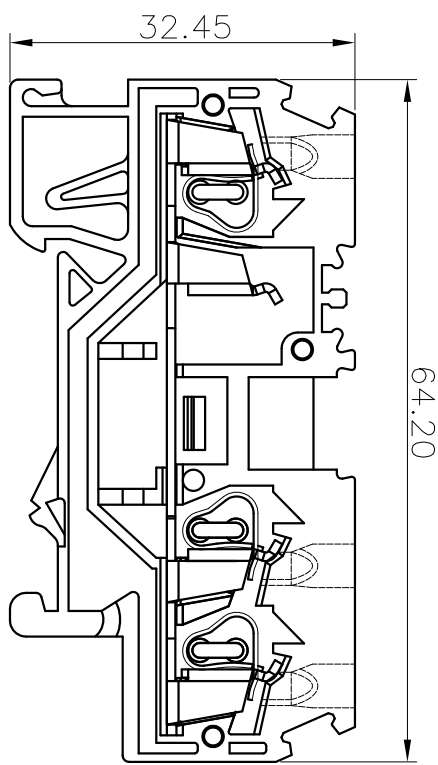
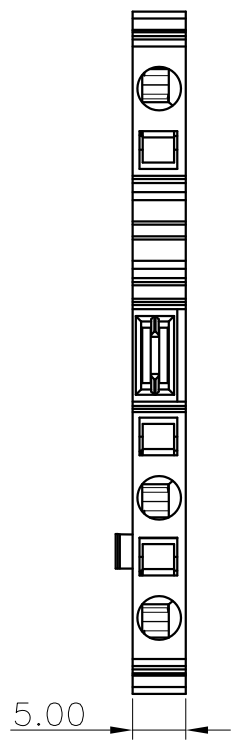


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE

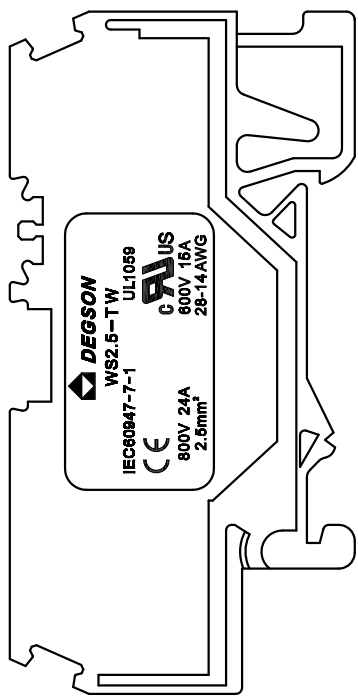

- NOTES:
- 1. Rated voltage/current : 600V / 15A
 - 2. Withstanding voltage : AC2200V/1Min.
 - 3. Wire range : 28~14AWG
- IEC Standard


IEC Standard	Pollution degree	3
Overvoltage category	III	
Rate impulse voltage(KV)	8.0KV	
Rate voltage(V)	800V	
Rate current(A)	24 A	

- 2. Wire range : 0.2~2.5mm²

- NOTES2:
1. Dimension shall be interpreted per ASME Y14.5-2009
 2. Pitch : 5.0mm, Poles : 01P
 3. Stripping length : 11~12mm
 4. Operating temperature: -40°C~+105°C
 5. Undimensioned tolerances:

Pitch range	in	mm	Nominal dimension	range	in	mm
Over	10	30	Over	100	Over	0.1/10
TO	10	60	TO	100	TO	≤
TO	10	24	TO	60	TO	150
TO	10	30	TO	100	TO	1.30
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00
±1.30	±2.0					

6. RoHS Compliance

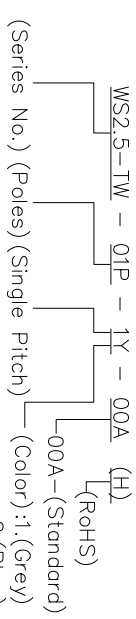

- 00A - (Standard)
- (RoHS)

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON [®] NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD:	/	CHKD:	/
DRFT:	/	TITLE:	CUSTOMER DRAWING
THIRD ANGLE PROJECTION		DRAWING NO.:	/
		DO NOT SCALE DRAWING	SCALE
		REV	DO
		SHEET	1/1
		SCALE	1:1