
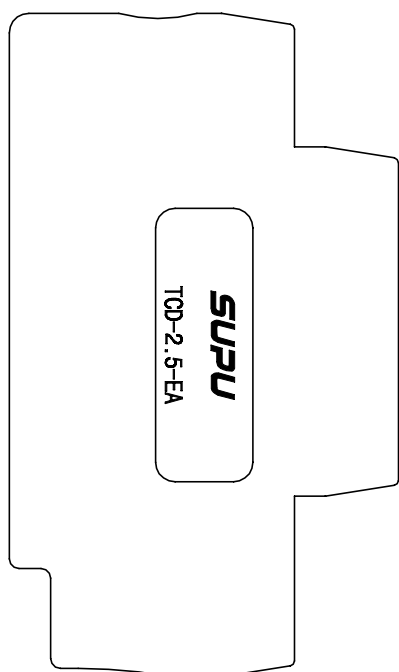


Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited.

未经允许禁止传输、复制、编辑该文档，以及利用其内容进行交流

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
△	DCN0006226	图纸更新	董方正	2020/1/07

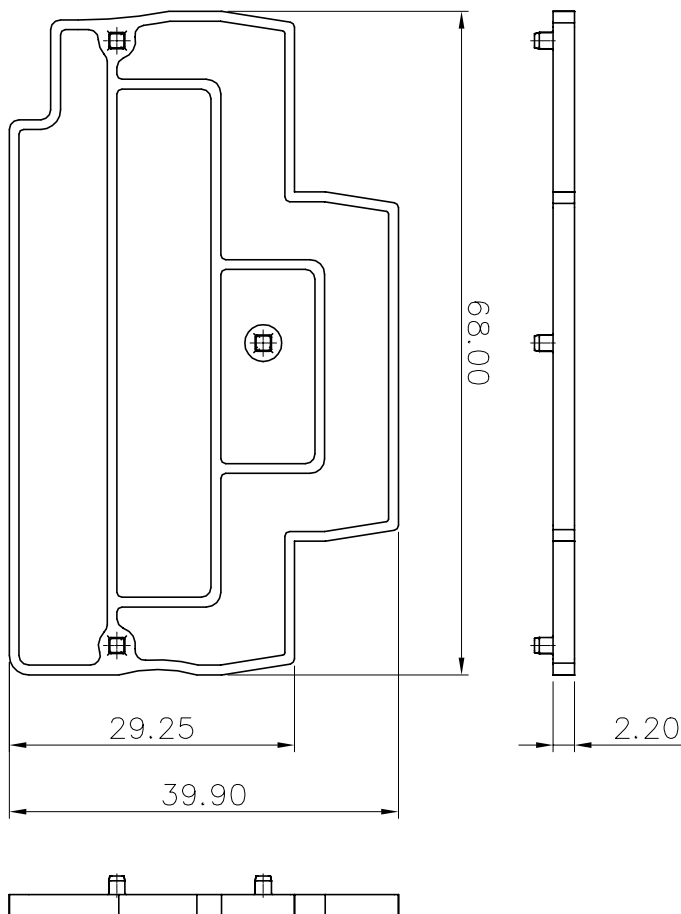

Material:

Insulator PA66 UL94 V-0

General information:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Operating temperature: -40°C~+105°C
3. RoHS Compliance
4. Undimensioned Tolerances:

Pitch	Range		In	Nominal Dimension		Range	Tolerance
	mm	mm		mm	mm		
6	Over	10	TO	Over	60	Over	0.1/10
10	Over	10	TO	Over	100	Over	0.1/10
24	Over	24	TO	Over	150	Over	0.1/10
30	Over	30	TO	Over	150	Over	0.1/10
60	Over	60	TO	Over	150	Over	0.1/10
100	Over	100	TO	Over	150	Over	0.1/10
150	Over	150	TO	Over	150	Over	0.1/10

HOW TO ORDER:

TCD2.5-2-XX-EA

Sereies No.

Color:
GY: Grey
BU: Blue
OG: Orange

Sereies No.

订货号 Order No.	TCD2.5-2-XX-EA	名称 Name	TC系列弹性弹簧 2.5mm 双层 接线端子面板	公差 Tolerance	表面 Surface
项目 Item	签字 Signature	日期 Date	图号 Drawing No.	阶段标记 Progress	版本 Revision
设计 Design	dfz	01/06/20	材料 Material	M	1
审核 Check	cw	01/06/20	物料号 Item No.	重量 Weight	比例 Scale
工艺 Process	-	-	412999001	/	1:1
标准化 Unit	-	-	412999002	第1页/共1页	1 of 1
批准 Approve	lw1	01/06/20	412999003	NINGBO SUPU ELECTRONICS CO.,LTD.	

1 2 3 4 5 6 7 8