

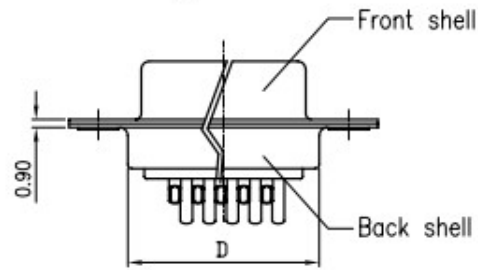



D-SUB H.D SOLDER TYPE

SERIES DHS-15F, DHS-15M, DHS-26F, DHS-26M, DHS-44F, DHS-44M, DHS-62F, DHS-62M

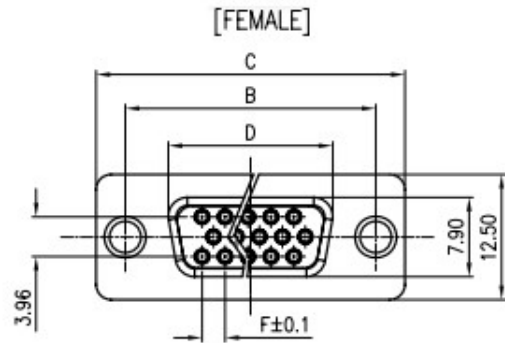


Dimension




Position	A±0.2	B±0.2	C±0.3	D	E
15	17.90	24.99	30.80	16.33	2.29
26	26.50	33.32	39.14	24.66	2.29
44	40.00	47.04	53.04	38.38	2.29
62	56.50	63.50	69.32	54.84	2.14



CC TYPE



CS TYPE

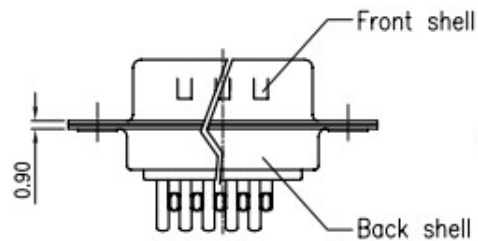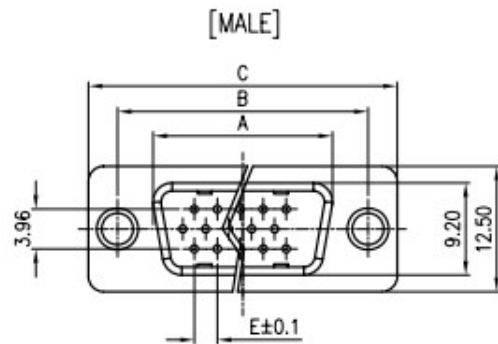

NOTES:

1. ELECTRICAL CHARACTERISTICS:

- 1.1 CONTACT RESISTANCE: 20mΩ Max. INITIAL.
- 1.2 DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
- 1.3 INSULATION RESISTANCE: 1000MΩ Min.

2. ENVIRONMENT CHARACTERISTICS:

- 3.1 OPERATING TEMPERATURE: 0°C~+85°C.
- 3.2 STORAGE TEMPERATURE: -20°C~+70°C.