
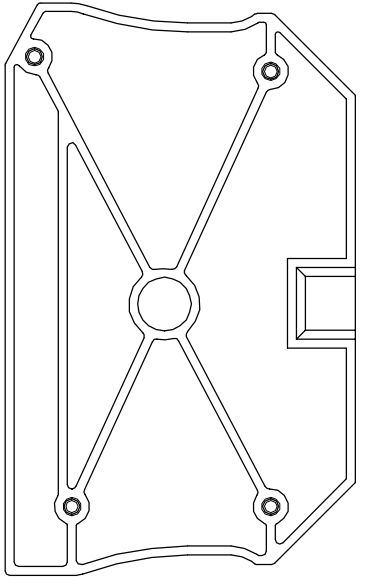



Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited.

未经允许禁止传输、复制、编辑该文档，以及利用其内容进行交流

REVISION RECORD			
REV	ECN	DESCRIPTION	DATE

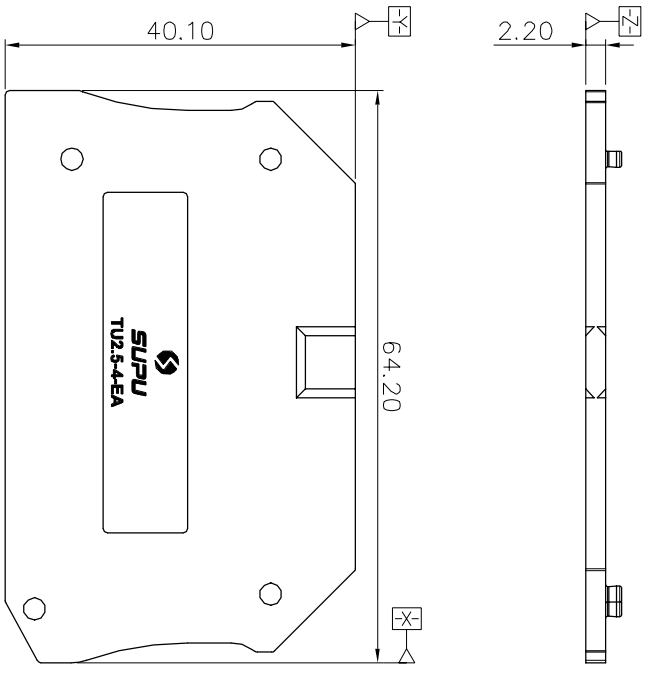

NOTES:  
Material: Insulator PA66 UL94 V-0

General information:  
1. Dimension shall be interpreted per ASME Y14.5-2009  
2. Operating temperature: -40°C~+105°C  
3. RoHS Compliance  
4. Undimensioned Tolerances:

Pitch Range in mm	Over	Nominal Dimension	In mm	Over	Over	Over	Over
6 TO 10	10	30 TO 60	100	150	0.1/10	∠	∠
10 TO 24	24	60 TO 100	150	±2	∠	∠	∠

HOW TO ORDER:

TU2.5-4-XX-EA  
Series No. | Color: GY: Grey, BU: Blue, OQ: Orange  
Series No.

订货号 Order No.	TU2.5-4-XX-EA	名称 Name	TU2.5-4 接线端子盖板	未注公差 Tolerance	表面 Surface
项目 Item	签字 Signature	图号 Drawing No.	NOTES	公差表 Tolerances Table	VDI21
设计 Design	cjs	材料 Material	/	版本号 Revision Number	重量 Weight
审核 Check	cw	物料号 Item No.	/	M1	比例 Scale
工艺 Process	-		/		1:1
标准化 Unity	-		/		
批准 Approve	lw1		/		
	01/12/21				

NINGBO SUPU ELECTRONICS CO.,LTD.  
SUPU 宁波波普电子有限公司