

Product details:


Rating Current:

F.T: 500mA 1A 1.5A 2A 2.5A

3A 3.5A 4A 5A 6.3A 8A 10A

13A 15A 20A 30A 40A

Rating Voltage: 250V 500V 600V

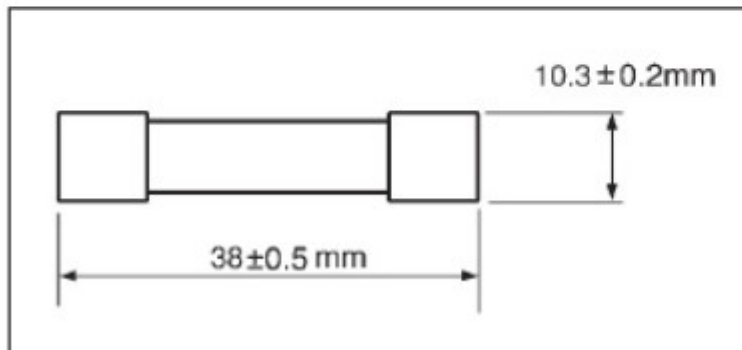

ELECTRICAL CHARACTERISTICS

RATING		BLOWING TIME
2.1In	Max	30min
2.75In	Min	20ms
	Max	5sec
4In	Min	10ms
	Max	300sec
10In	Min	50ms