




REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
△		修改线数: 改为每个脚脚代表一线	LJH	03/22/08*
△	10-0363	修改技术参数	ZXX	10/28/10*





Notes:

1. Pitch: 5.08mm, Ploes: XXP
2. Rated voltage/current: UL 300V/20A △
VDE 250V/24A
3. Temp. Range: -40° C ~ +105° C
4. Wrthstanding voltage: AC2000V/1Min
5. Insulation resistance: 5000MΩ/DC1000V
6. Wire range: 28~12AWG, 2.5mm² △
7. Max. Torque Value: M2.5, 4.08kgf.cm
8. Undimensioned Tolerances:

Pitch range in mm		Nominal dimension range in mm						
to 6	over 6 to 10	over 10 to 24	to 30	over 30 to 60	over 60 to 100	over 100 to 150	∩	
±0.10	±0.15	±0.25	±0.2	±0.3	±0.5	±0.7	±1.0	0.05/10

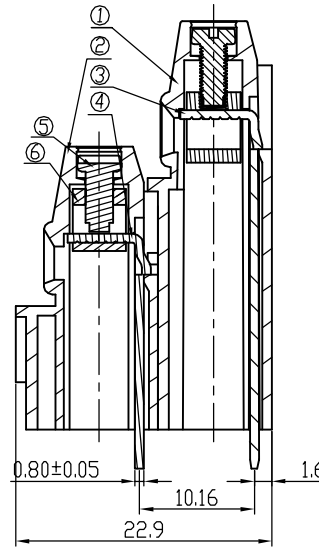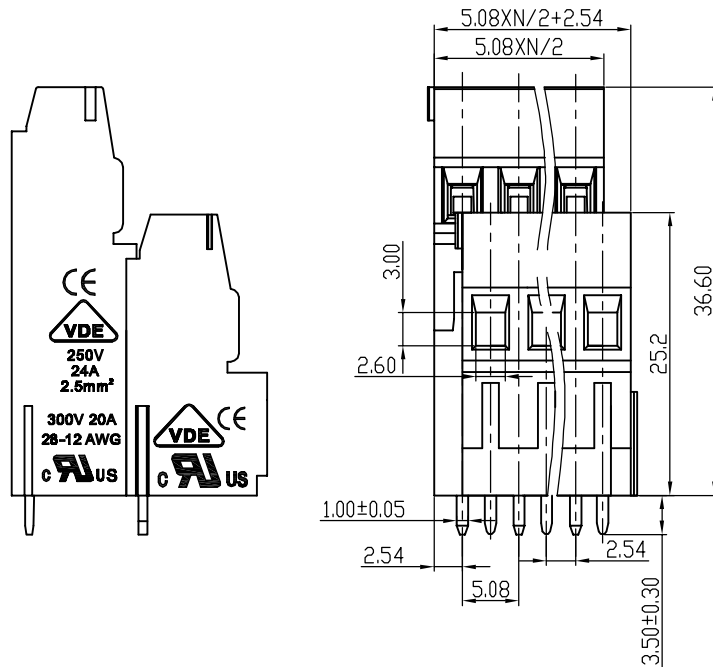

SECTION A-A

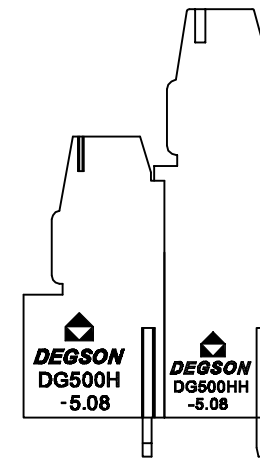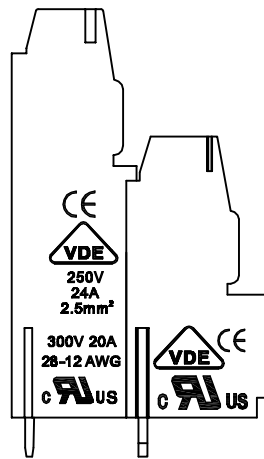

6	DG128 Wire guard	X00000020 (H)	△	XX	Brass	Ni plated
5	DG128 "Screws	S000001460 (H)	△	XX	Steel	Cr ³⁺ Zn
4	DG500H-Pin header	4038B00010 (H)	△	XX/2	Brass	SnCe
3	DG500HH-Pin header	4060B00010 (H)	△	XX/2	Brass	SnCe
2	DG500H-5.08-Housing	4038A0Y (XX/2) A (H)	△	1	PA66	UL94V-0

ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTES
1	DG500HH-5.08 Housing (H)	4060A0Y (XX/2) A (H)	1	PA66	UL94V-0

MM (INCH)	DATE 04/26/07*
CHKD	DATE
MFD	DATE
APPVL	DATE
MATERIAL :	
ANGLES ± 1°	G.E. :
FINISH:	
THIRD ANGLE PROJECTION	SCALE : 1:1

宁波高正电子有限公司 DEGSON ELECTRONICS CO., LTD	
NAME	
DG500AA-5.08-XXP-1Y-00A(H)	
DRAWING NO. DG500AA-5.08-E01	SIZE A3
/PART NO.	REV T2 10/28/10*
DO NOT SCALE DRAWING	SHEET 1 OF 1