


Category: 插拔式端子-插头/Plug-in terminal-plug

Product name: MC-RH5.08HXXC-T-0001

Product Description: 5.08mm , 320V , 12A CE



### Product Picture

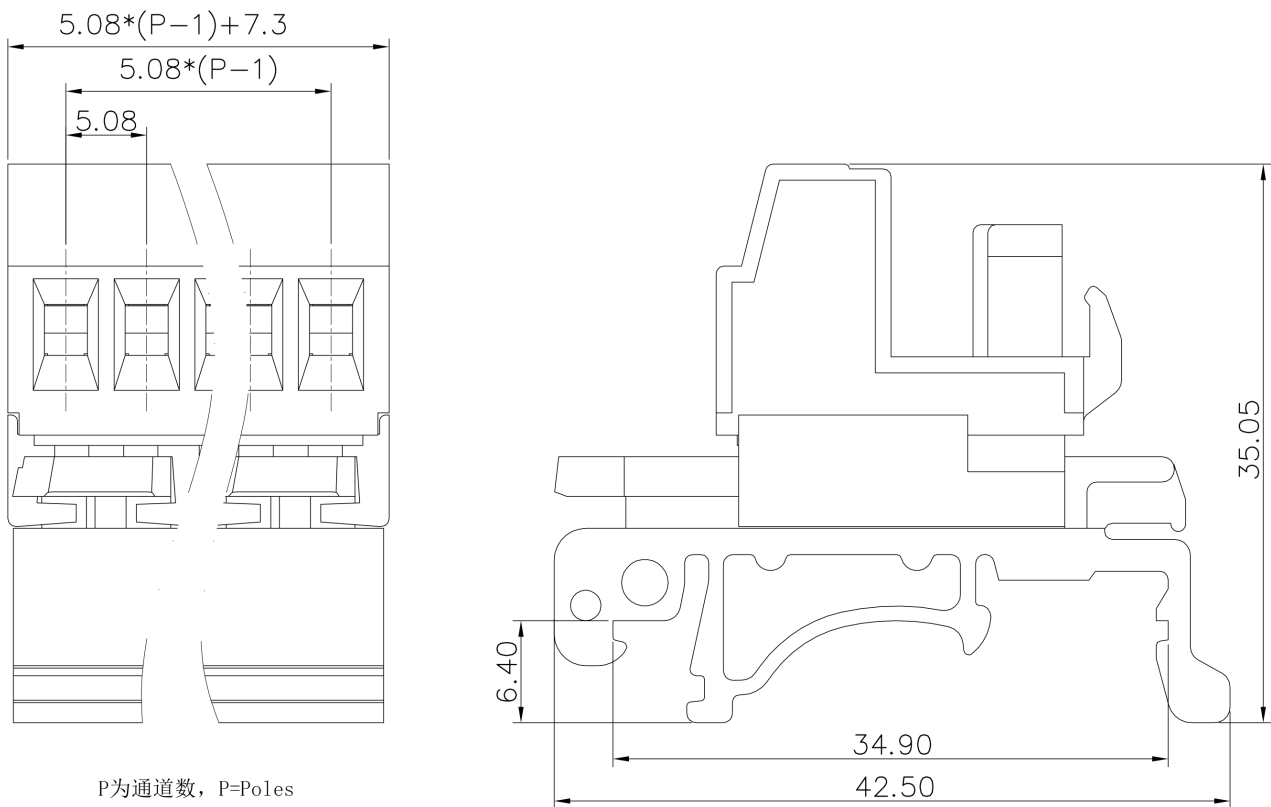

### 基本信息 /Basic Information

|                               |                      |
|-------------------------------|----------------------|
| 产品型号<br>SUPU ID               | MC-RH5.08HXXC-T-0001 |
| 产品间距<br>Pitch                 | 5.08mm               |
| 产品层数<br>Number of levels      | 1                    |
| 产品位数<br>Number of connections | 2P-22P               |
| 接线方式<br>Connection method     | 螺钉接线                 |

|                          |            |
|--------------------------|------------|
| 防护等级<br>Protection Level | IP20       |
| 工作温度<br>Work temperature | -40~+105°C |

## IEC数据 /IEC Data

|  |                        |
|--|------------------------|
| 额定电流<br>Rated Current  | 12A                    |
| 额定电压<br>Rated Voltage  | 320V                   |
| 过压类别<br>Overvoltage category                                   | III III II             |
| 污染等级<br>Pollution degree                                       | 3 2 2                  |
| 额定冲击电压<br>Rated impulse voltage                                | 4KV 4KV 4KV            |
| 额定电压<br>Rated Voltage  | 320V 320V 630V         |
| 硬导线截面积<br>Conductor cross section solid                        | 0.2-2.5MM <sup>2</sup> |
| 柔性导线截面积<br>Conductor cross section flexible                    | 0.2-2.5MM <sup>2</sup> |
| 柔性导线截面积，带绝缘管套<br>Conductor cross section flexible,with furrule | 0.2-2.5MM <sup>2</sup> |
| 锁线螺钉规格<br>Locking screw Specification                          | M3                     |
| 额定扭矩<br>Rated Torque   | 0.5-0.6N.m             |
| 固定螺钉规格<br>Fixed Screw Specification                            | -                      |
| 额定扭矩<br>Rated Torque   | -                      |
| 剥线长度<br>Stripping length                                       | 7-8mm                  |

## UL数据 /UL Data

|                       |     |   |     |
|-----------------------|-----|---|-----|
| 使用组别<br>Use group     | B   | C | D   |
| 额定电流<br>Rated Current | 15A | - | 15A |

---

|                       |      |   |      |
|-----------------------|------|---|------|
| 额定电压<br>Rated Voltage | 300V | - | 300V |
|-----------------------|------|---|------|

---

|                               |          |  |  |
|-------------------------------|----------|--|--|
| 额定接线容量<br>Rated cross section | 30-12AWG |  |  |
|-------------------------------|----------|--|--|

---

## 材料信息 /Material Data

---

|                             |      |
|-----------------------------|------|
| 绝缘材料<br>Insulation material | PA66 |
|-----------------------------|------|

---

|                                     |   |
|-------------------------------------|---|
| 绝缘材料组别<br>Insulation material group | I |
|-------------------------------------|---|

---

|   |    |
|---|----|
| 阻燃等级，符合UL94<br>Flame retardant grade, UL94 compliance | V0 |
|---|----|

---

|                          |              |
|--------------------------|--------------|
| 导体材料<br>Contact material | Copper alloy |
|--------------------------|--------------|

---

|                                   |           |
|-----------------------------------|-----------|
| 导体表面镀层<br>Surface characteristics | Sn,Plated |
|-----------------------------------|-----------|

---

## 产品认证 /Product Certification

---

认证图标  
Certificate



UL证书号  
UL file No.

VDE证书号  
VDE No.

TUV证书号  
TUV No.

CE证书号  
CE No. 0B181010.NSET013

---

Ningbo Supu Electronics Co.,Ltd

Zip code: 315303

Fax: +86 574-63288170

E-mail : askme@supu.cn

Address: No. 625, Kandun Town Street, Cixi  
City, Zhejiang Province

Switchboard: +86 574-63288158

E-mail : askme@supu.cn

Service Hotline: 400-626-6336



Code

---

File date : 2024-10-24 19:07

Product Entry : 2023-09-27

The right to modify data belongs to  
Supu.