


Push-in terminal block-UJ6-16JD - 421515



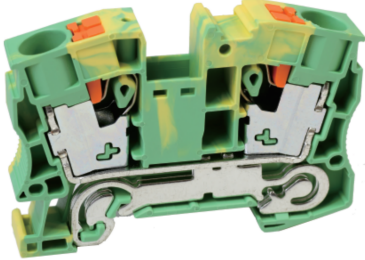


Push-in terminal block , connection method : spring connection , number of connection : 2 , crimping range : 1.5mm² -16mm² , AWG : 16-6 , thickness:10.2mm , heighe: 49.6mm , color : yellow-green , mounting type : TH35-7.5、 TH35-15

Product parameter

Parameter	Data
Packing unit (PCS)	30
NW per piece(g)	47.2
Layers	1
Number of connections	2
Rated cross section(mm ²)	16
Color	yellow-green
Insulation Materials	PA
Flame retardant grade	V0
Temperature of insulation material	-40 ~ +125
Wire feed	Above the terminal

Product certification

Parameter	Data
Certification logo	
Certification logo	
Certification logo	

Technical data

Parameter	Data
Connection Method	Spring connection
Stripping length(mm)	22
Solid conductors(mm ²)	1.5-25
Solid conductors AWG	16-4
Stranded conductors(mm ²)	1.5-16
Stranded conductors AWG	16-6
Connection in acc. with standard	IEC 60947-7-1
Operating temperature ()	-40 ~ +105
Ambient temperature (storage/transportation) ()	-25 ~ +55
Relative humidity	30% ~ 90%

Dimension

Parameter	Data
Width(mm)	74
Thickness(mm)	12.2
Height(mm)	50.6