



Industrial & Electrical Components

# Relay Socket


Part No.

14F1C-XZ  
14F2C-XZ

## 14F1C-XZ




## OUTLINE DIMENSIONS

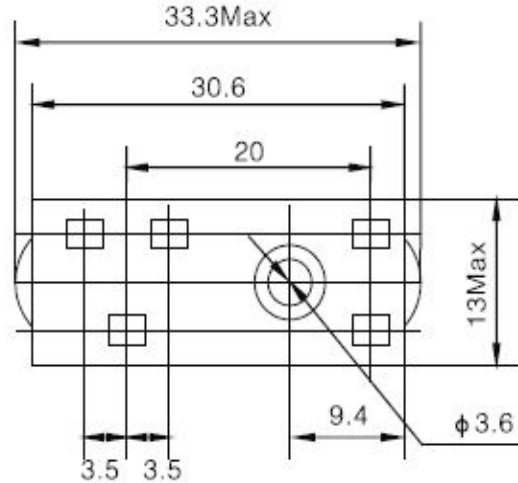

## SPECIFICATION

Rated Load	Current	10A
	Voltage	300V
Dielectric Strength		2500V
Ambient Temperature		-40~+75°C
Socket Material		Flame retardance PA66+GF(V1/V0)
Contacts Spring Material		QSn6.5-0.1
Clamp Spring Material		No
Module		No


## MOUNTING DIMENSIONS

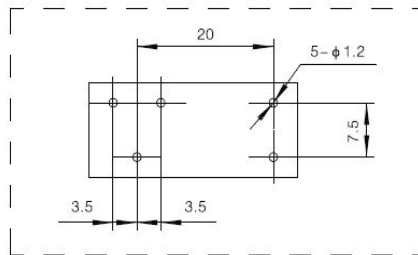

## 14F2C-XZ



## OUTLINE DIMENSIONS

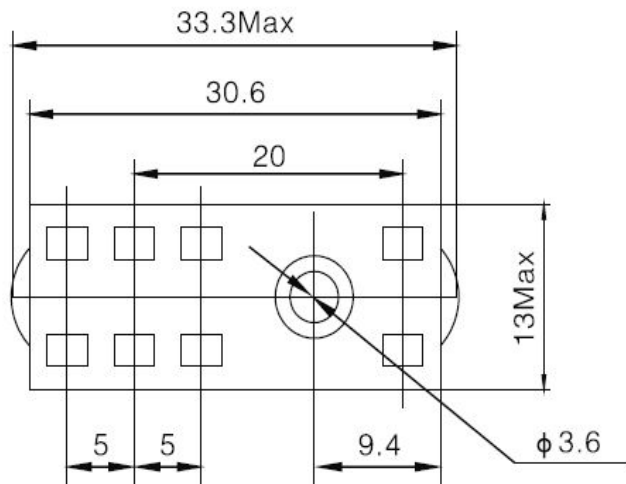

## SPECIFICATION

Rated Load	Current	5A
	Voltage	300V
Dielectric Strength		2500V
Ambient Temperature		-40~+75°C
Socket Material		Flame retardance PA66+GF(V1/V0)
Contacts Spring Material		QSn6.5-0.1
Clamp Spring Material		No
Module		No

## MOUNTING DIMENSIONS

