
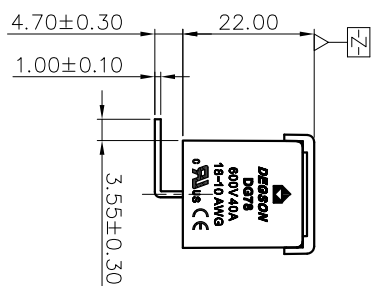
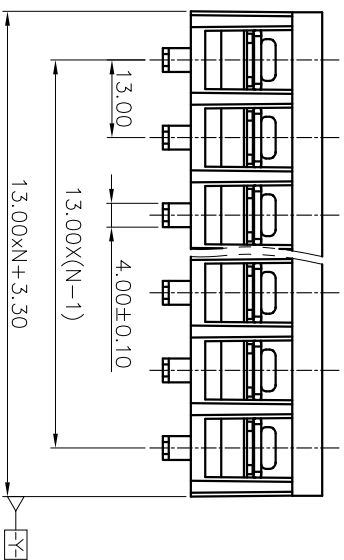


(W/O COVER)

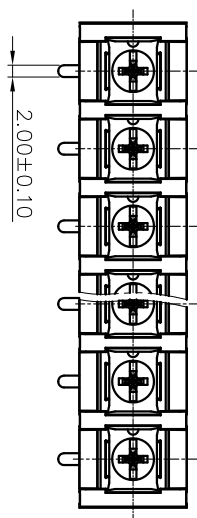


NOTES1:
 UL Standard
 1. Rated voltage/current : 600V / 40A
 2. Torque value : M4 , 10.53lb.in
 3. Wire range : 18~10AWG


NOTES2:
 1. Dimension shall be interpreted per ASME Y14.5-2009
 2. Pitch : 13.00mm, Poles : N=02~20P
 3. Stripping length : 8~9mm
 4. Withstanding voltage : AC2200V/1min
 5. Operating temperature: -40°C~+105°C
 6. Undimensioned tolerances:

Pitch range	in mm	Nominal dimension	range	tolerance
Over	6	Over	30	Over
To	10	To	60	To
6	24	30	100	150
		80	150	
		±0.15	±0.20	±0.30
		±0.30	±0.50	±0.70
		±1.00	±1.30	±2

7. RoHS Compliance

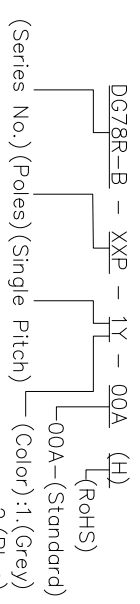

- 1. (Grey)
- 2. (Blue)
- 3. (Black)
- 4. (Green)
- 5. (Orange)
- 6. (Red)
- 7. (Transparent)
- 8. (Yellow)
- 9. (White)

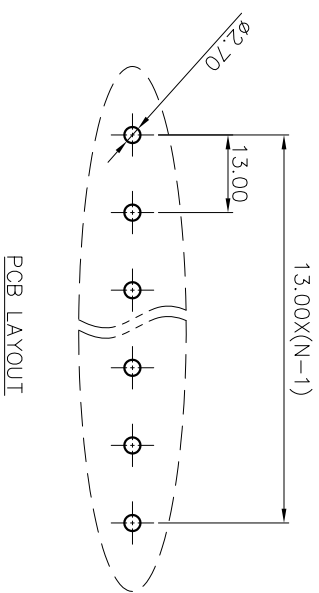

REVISION RECORD			
REV	EQN	DESCRIPTION	DATE

PART NO.: /		NAME: DEGSON NINGBO DEGSON ELECTRICAL CO., LTD	
APPR: /		TITLE: CUSTOMER DRAWING	
CHKD: /		DRAWING NO.: /	
DRFT: /		DO NOT SCALE DRAWING	
THIRD ANGLE PROJECTION		REV	DO
		SHEET	1/1
		SCALE	1:1

A B C D E F G H

8 7 6 5 4 3 2 1