
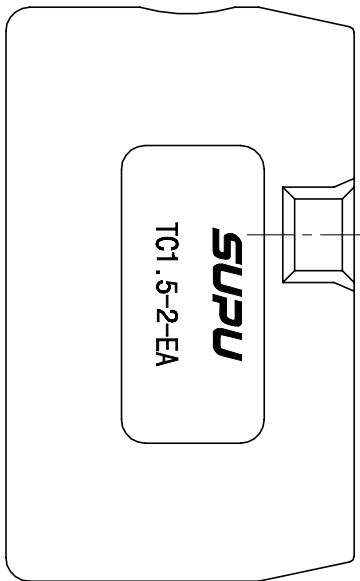

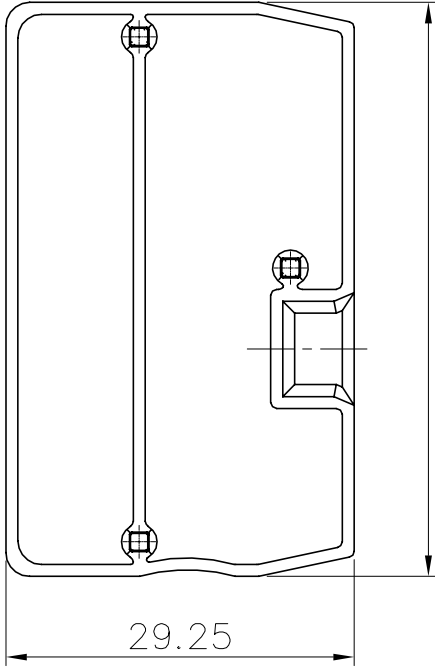


Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited.

未经允许禁止传输、复制、编辑该文档，以及利用其内容进行交流

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
△	DCN0006226	图纸更新	董方正	2020/1/07

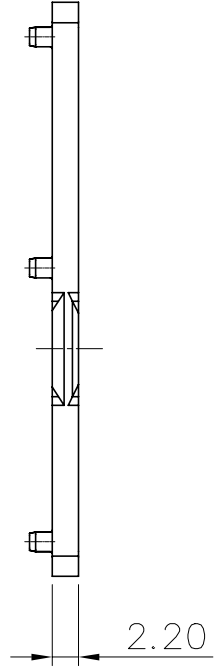

NOTES:

Material:

Insulator	PA66	UL94 V-0
-----------	------	----------

General information:

- 1.Dimension shall be interpreted per ASME Y14.5-2009
- 2.Operating temperature: -40°C~+105°C
- 3.RoHS Compliance
- 4.Undimensioned Tolerances:

Pitch Range	In mm		Nominal Dimension		Range		Tolerance
	mm	mm	mm	mm	mm	mm	
Over 6	TO 10	Over 10	TO 30	Over 30	TO 60	Over 60	0.1/10
TO 10	TO 24	TO 24	TO 30	TO 60	TO 100	TO 150	<
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±2°

HOW TO ORDER:

TC1.5-2-XX-EA

Series No. Series No.
Color: GY: Grey
BU: Blue
OG: Orange

订货号 Order No.	TC1.5-2-XX-EA	名称 Name	TC系列笼式弹簧 1.5mm ² 一进一出 接线端子插板	未注公差 Tolerance	表面 Surface
项目 Item	签字 Signature	日期 Date	图号 Drawing No.	阶段标记 Progress	版本 Revision
设计 Design	dfz	01/06/20 ²	材料 Material	M	1
审核 Check	cw	01/06/20 ²	物料号 Item No.	重量 Weight	比例 Scale
工艺 Process	-	-	411514001	/	1:1
标准化 Unify	-	-	411514002	第1页/共1页 1 of 1	
批准 Approve	lw1	01/06/20 ²	411514003	VD121	

SUPU 宁波盛普电子有限公司
NINGBO SUPU ELECTRONICS CO.,LTD.