


Category: 插拔式端子-插头/Plug-in terminal-plug

Product name: MC-RE7.62VXXC-R-0001

Product Description: 7.62mm , 630V , 18A CE,UL

Product Picture

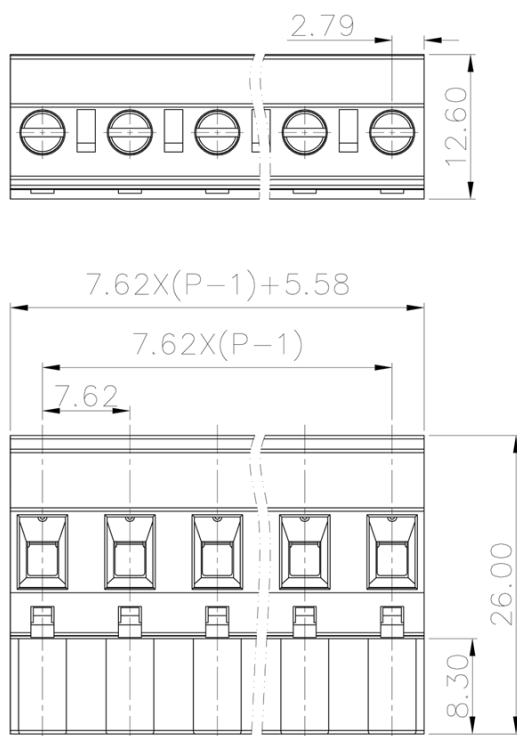

基本信息 /Basic Information

产品型号 SUPU ID	MC-RE7.62VXXC-R-0001
产品间距 Pitch	7.62mm
产品层数 Number of levels	1
产品位数 Number of connections	2P-24P
接线方式 Connection method	螺钉接线 Screw connection
防护等级 Protection Level	IP20

工作温度			
Work temperature	-40~+105℃		

IEC数据 /IEC Data

额定电流	18A		
Rated Current			
额定电压	630V		
Rated Voltage			
过压类别	III	III	II
Overvoltage category			
污染等级	3	2	2
Pollution degree			
额定冲击电压	6.0KV	6.0KV	6.0KV
Rated impulse voltage			
额定电压	500V	630V	1000V
Rated Voltage			
硬导线截面积	0.2-2.5mm ²		
Conductor cross section solid			
柔性导线截面积	0.2-2.5mm ²		
Conductor cross section flexible			
柔性导线截面积，带绝缘管套	0.2-2.5mm ²		
Conductor cross section flexible,with furrule			
锁线螺钉规格	M3		
Locking screw Specification			
额定扭矩	0.5N.m		
Rated Torque			
固定螺钉规格	-		
Fixed Screw Specification			
额定扭矩	-		
Rated Torque			
剥线长度	7-8mm		
Stripping length			

UL数据 /UL Data


使用组别	B	C	D
Use group			
额定电流	15A	-	10A
Rated Current			
额定电压	300V	-	300V
Rated Voltage			

额定接线容量	24-12AWG
Rated cross section	

材料信息 /Material Data

绝缘材料	PA66
Insulation material	
绝缘材料组别	I
Insulation material group	
阻燃等级，符合UL94	V0
Flame retardant grade, UL94 compliance	
导电体材料	Copper alloy
Contact material	
导电体表面镀层	Sn,Plated
Surface characteristics	

产品认证 /Product Certification

认证图标	
Certificate	
UL证书号	
UL file No.	
VDE证书号	
VDE No.	
TUV证书号	
TUV No.	

Ningbo Supu Electronics Co.,Ltd

Zip code: 315303

Fax: +86 574-63288170

E-mail : askme@supu.cn

Address: No. 625, Kandun Town Street, Cixi

City, Zhejiang Province

Switchboard: +86 574-63288158

E-mail : askme@supu.cn

Service Hotline: 400-626-6336



Code