

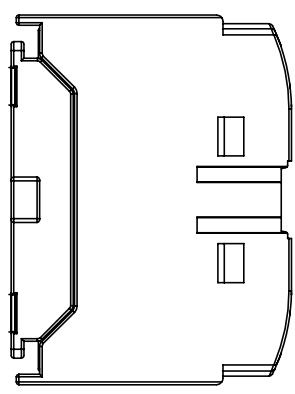



REVISION RECORD			
REV	ECN	DESCRIPTION	DATE

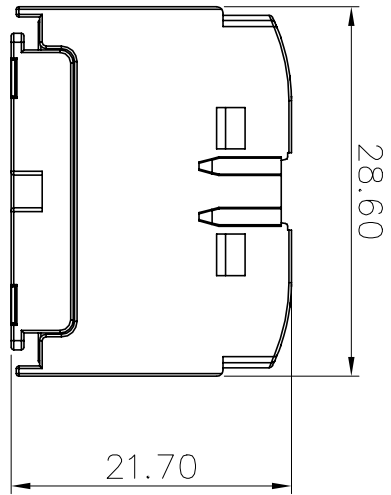

Connection method:
 1. For Solid wire, peel wire in right length, push down the wire.
 2. For flexible wire, peeling wire in right length, pushdown the key & fix the wire, or wire furred and fix then.

Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited.
 未经允许禁止传输、复制、编辑该文档，以及利用其内容进行交流

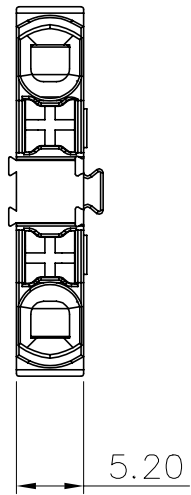

NOTES:
 UL/CUL Standard
 1. Conductor cross section : 26~12AWG
 2. Rated Voltage/Current :

Use group	B	C	D
Rated voltage(V)	300	300	
Rated current(A)	20	20	

EC Standard
 1. Conductor cross section :

Wire range(Solid/Stranded)	0.2-2.5mm ²	0.2-4mm ²	0.2-2.5mm ²
Solid			
Stranded			
Stranded with ferrules			
Stranded without plastic sleeve			
Stranded with plastic sleeve			

2. Rated Voltage/Current :

Surge voltage category	III
Pollution degree	3
Rated surge voltage(kV)	6
Rated voltage(V)	500
Rated current(A)	24

Material:

Insulator	PA66	UL94 V-0
Conductor	Copper alloy	Sn Plated
Spring	Stainless steel	
Button	POM	

General information:

1. Dimension shall be interpreted per ASME Y14.5-2009
2. Stripping length : 8~10mm
3. Operating temperature: -40°C~+105°C
4. RoHS Compliance
5. Undimensioned Tolerances:

HOW TO ORDER:

TPA2.5-2-XX

Sereies No.

Color:
 GY: Grey
 BU: Blue
 OG: Orange
 GN: Green

订货号 Order No.	TPA2.5-2-XX	名称 Name	TPA系列直插式弹簧 2.5mm ² 两配配电块	表面 Surface
项目 Item	签字 Signature	图号 Drawing No.	PM001988	VDI21
设计 Design	日期 Date	材料 Material	Notes	阶段标记 Progress
审核 Check	01/11/20*	物料号 Item No.	411526001	版本 Revision
工艺 Process	-	物料号 Item No.	411526002	重量 Weight
标准化 Unify	-	物料号 Item No.	411526003	比例 Scale
批准 Approve	lw1	物料号 Item No.	411526004	1:1