
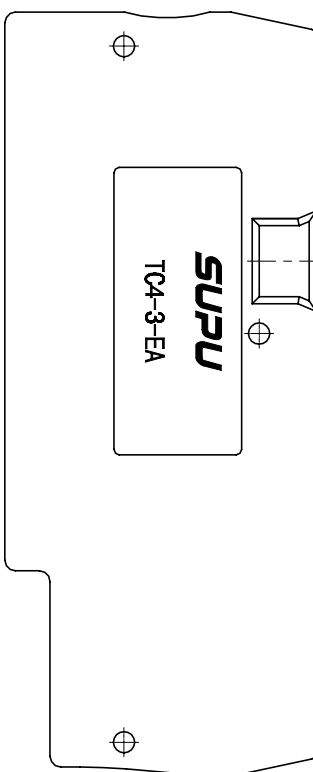

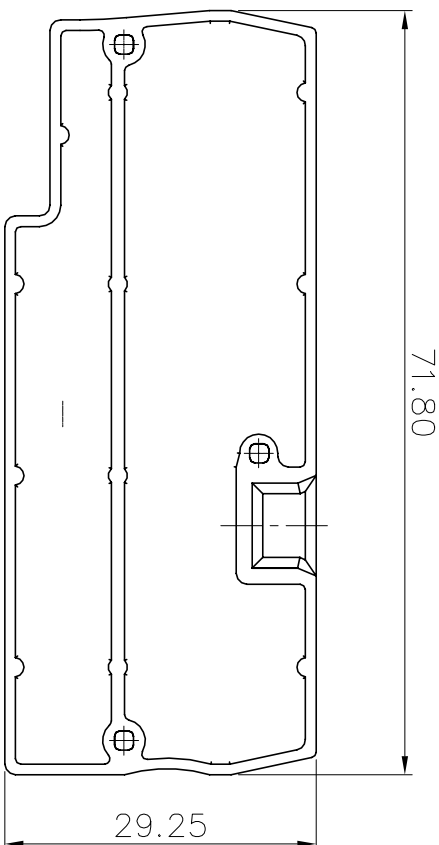


Transmittal, reproduction, dissemination and/or editing of this document as well as utilization of its contents and communication thereof to others without express authorization are prohibited.

未经允许禁止传输、复制、编辑该文档，以及利用其内容进行交流

REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE
△	DCN0006226	图纸更新	董方正	2020/1/07

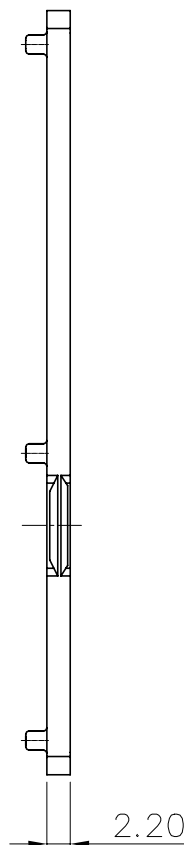

NOTES:  
Material: Insulator PA66 UL94 V-0

General information:  
1. Dimension shall be interpreted per ASME Y14.5-2009  
2. Operating temperature: -40°C~+105°C  
3. RoHS Compliance  
4. Undimensioned Tolerances:

Pitch	Range		In	Nominal Dimension		Range	mm
	Over	Under		mm	mm		
6	TO	10	TO	30	TO	60	0.1/10
10	TO	24	TO	30	TO	100	<
30	TO	60	TO	60	TO	150	
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±2°

HOW TO ORDER:

TC4-3-XX-EA  
Series No. Series No.  
Color: GY: Grey BU: Blue OG: Orange

Order No.	TC4-3-XX-EA	Item	Signature	Date	Name	Drawing No.	Material	Notes	Item No.	411514205	411514206
设计	dfz	01/06/20		TC系列弹簧 4mm一进两出 接线端子端板	PRM000993	Notes					
审核	cw	01/06/20									
工艺	-	-									
标准化	-	-									
批准	lw1	01/06/20									
Approve											

1 2 3 4 5 6 7 8

F E D C B A

公差	公差	公差	公差	公差	公差	公差	公差	公差	公差	公差	
未注公差	Tolerances	Table	阶段标记	版本	Revision	重量	Weight	比例	Scale	表面	Surface
			M	1		/		1:1		VDI21	

第1页/共1页 1 of 1

NINGBO SUPU ELECTRONICS CO.,LTD.