


Data sheet

Commercial Art.No.: 91.030.5253.0

Distributor GST15i3V 5P1H W WS

GST15i3 HH distributor, 3 pole, 1 input 5 outputs, with mounting option on separate mounting plate, coding mains 250 V, 16 A, coding color white

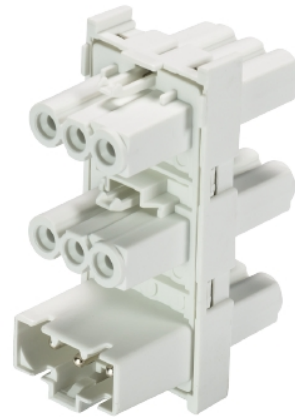

Commercial Art.No.	91.030.5253.0
EAN	4049088018688
Order Unit	1

Certificates / Approvals



Technical data

General

Rated current	16 A
Rated voltage	250 V
Rated impulse voltage	4 kV
Pollution degree	2
Mechanical coding	Code 1
Lockable	self-locking (unlocking by tool)
Color of coding/ contact carrier	white
Marking of poles	L, N, PE

Model

Number of inputs	1
Number of outputs	5
Type of fastening	No
Degree of protection (IP)	IP20
Type of distributor	HH-distributor

Material

Housing material	Polyamide
halogen free	yes
Contact material	CuZn
Fire load	0.103 kWh
Insulation components continuous temperature	100 °C

Surface finish	Silver-plated
----------------	---------------

Dimensions

Length	36.2 mm
Width	21.6 mm
Height	50.1 mm

Classification


ECLASS 11	
ECLASS 8.1	27440603
ETIM 7.0	EC002567
ETIM 6.0	EC002567
ETIM 5.0	EC002567
ETIM 4.0	EC002567

Product compliance

ROHS conformity status	Compliant/Exempted
ROHS exceptions	III-6(c)
REACH-SVHC conformity status	Duty-To-Declare
REACH-SVHC substances	Lead
REACH-SVHC CAS numbers	7439-92-1

Accessories

Commercial Art.No.:	Article-type description:	Description:
07.418.9253.1	Supporting plate GST15 HH-V	gesis®-Mounting plate for GST15 HH-distributors (5 outputs); Wall mounting with screws; fixing on cable trays with moulded expanding rivets; lying distributor mounting

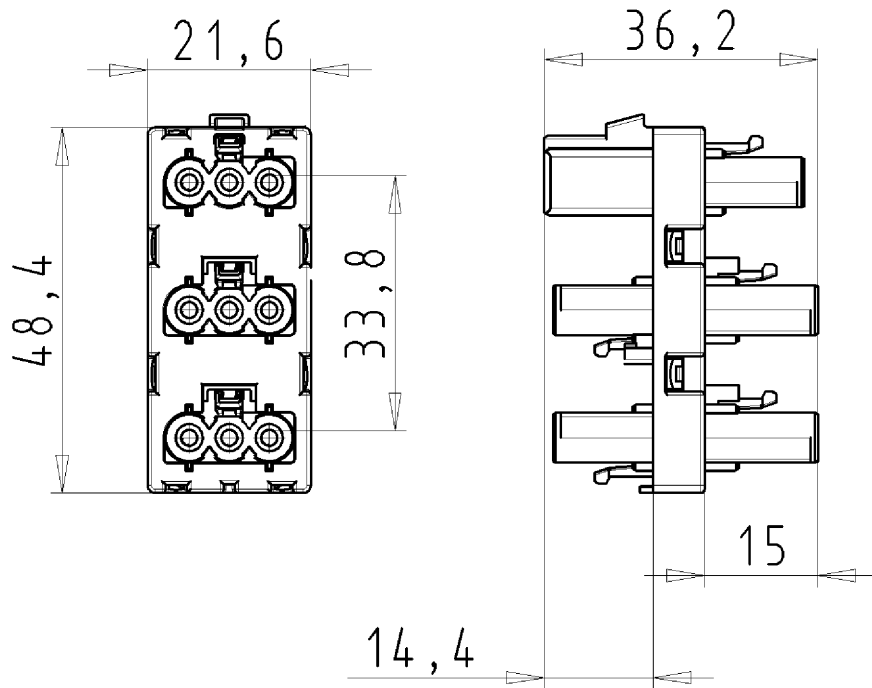

Verteiler (GST13i3)
 91.030.5253.0 10W
 08.06.2009 RIK
 M1:1