




JIULONG MOTOR
AC/DC FANS COOLING FANS



1

[Http://www.xtgygs.cn](http://www.xtgygs.cn)
如蒙特殊电压也可提供, 本公司保留技术更改权利。
Special voltage may be provided if necessary according to the inquiry. Jiulong all technical modification rights reserved.

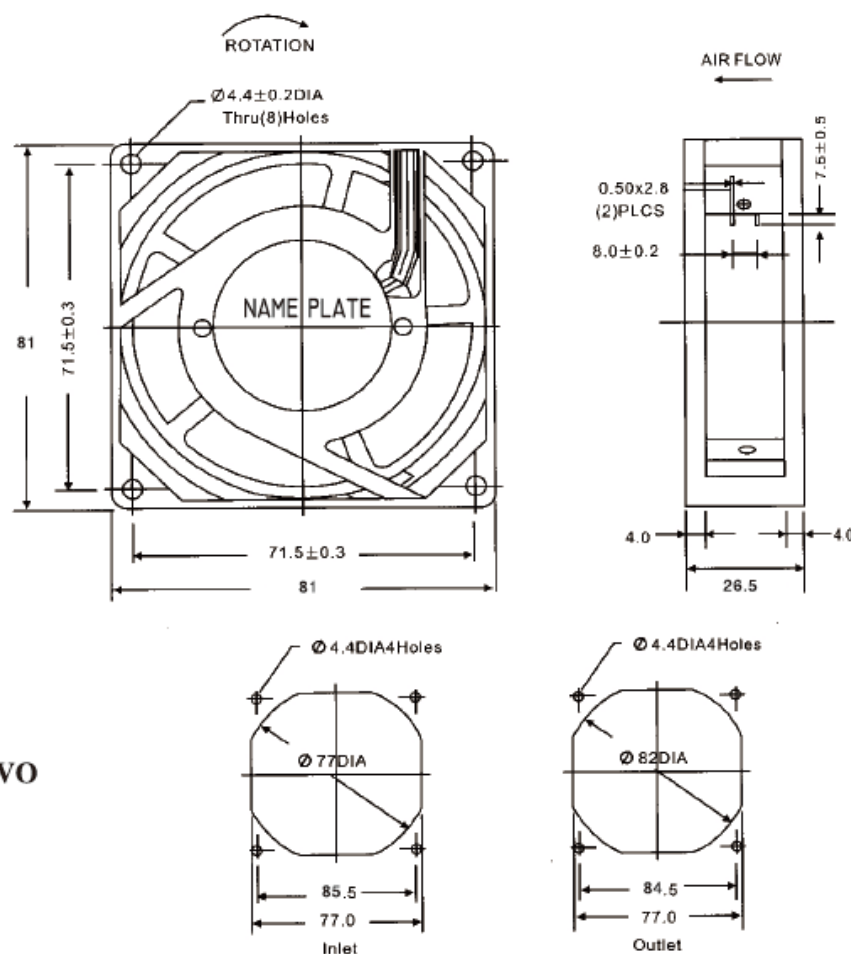

尺寸 Size: 80mmx80mmx25mm

风量 Airflow: 32-39m³/hr
19-23CFM

重量 Weight: 260g

噪音 Noise: 26-33dBA

风叶 Impeller Material: PBT Thermoplastic Black, UL94-V0

外框 Frame: Aluminum Alloy


端子 Terminals: 0.5mm

引线 Lead Wire: AWG#22 UL 1569(Optional)

马达 Motor: Shaded Pole Induction Motor

温度范围 Operating Temperature: -10°C~+65°C


Model (型号)	Bearing System (轴承型式)	Voltage VAC (电压)	Freq. Hz (频率)	Current A (电流)	Power W (功率)	Speed RPM (转速)	Noise dBA (噪音)	Air Flow (风量)		Phase (相数)	Capacitor (电容)
								M3/hr	CFM		
G8025HA ₁ S	Sleeve	100/125	50/60	0.09	15/12	2300/2750	26/33	32/39	19/23	1	/
G8025HA ₂ S		200/240	50/60	0.09	15/12	2300/2750	26/33	32/39	19/23	1	/
G8025HA ₁ B	Ball	100/125	50/60	0.09	15/12	2300/2750	26/33	32/39	19/23	1	/
G8025HA ₂ B		200/240	50/60	0.09	15/12	2300/2750	26/33	32/39	19/23	1	/

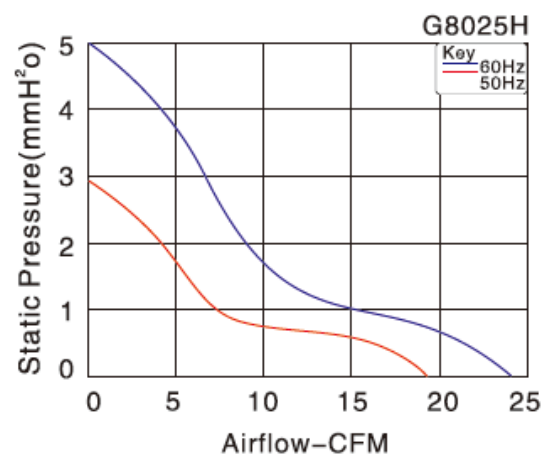


Fan Accessories




JL80FOR



JL80-MF



JL71H(B)-A



JL80H(B)



JL71H(B)-B



JL9801.200