


Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this document is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

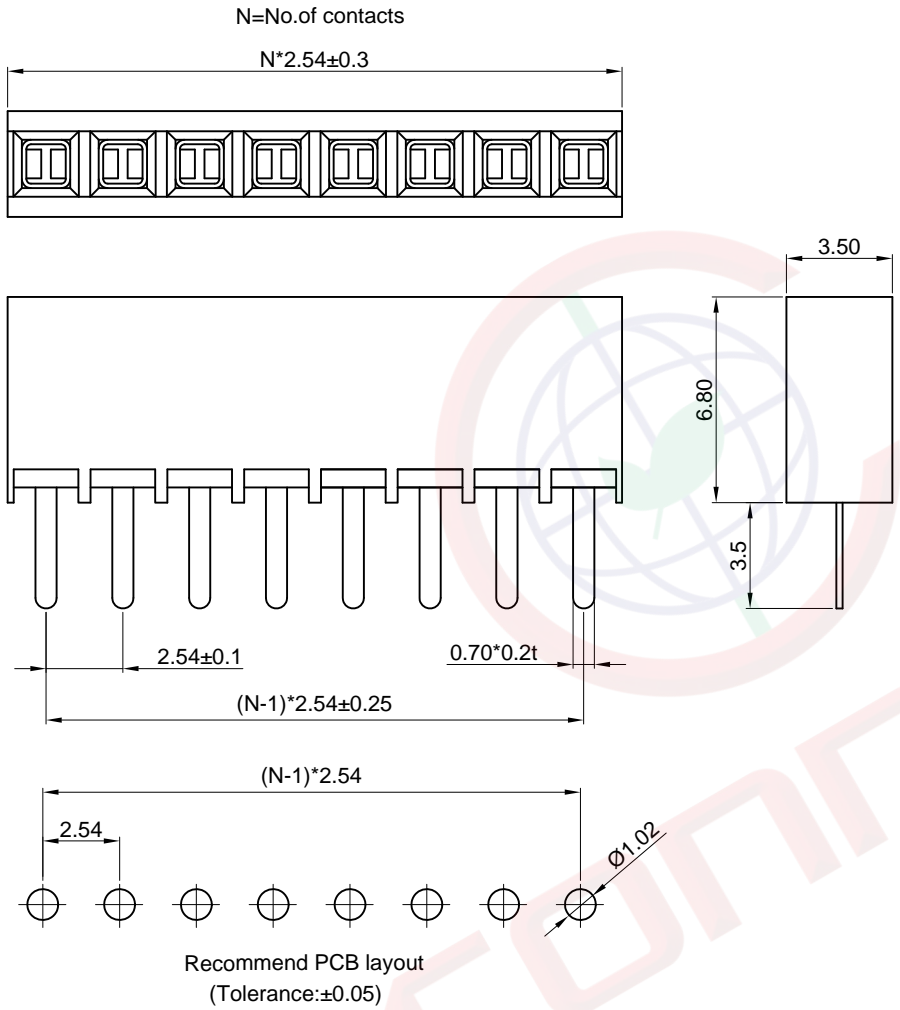

(Series Image-Reference Only)

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	ych 01/24/08'	~	LJC 01/24/08'
B	DRAWING UPDATE	JLZ 09/07/17'	HZW 09/07/17'	LJC 09/07/17'
C	DRAWING UPDATE	JLZ 07/07/18'	~	

- Notes:
- Specifications:
- Contact Resistance: 20mΩ Max.
 - Insulation Resistance: 1000MΩ Min.
 - Dielectric Withstanding Voltage: 600V AC(rms) For 1 Minute.
 - Current Rating:3A.
 - Temperature: -40°C~+105°C.
- Materials:
- Contact Material: Copper Alloy.
 - Contact Plating: Gold Plating Over Nickel.
 - Insulator Materials: High Temp,Black,UL94-V0.
- Product Number Code:
- DS1023-06 - X X X
- Contact plating: 8: Full gold flash
 - Mounting type: V: V/T type
 - No.of contacts: 1x2 - 1x40

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION		TITLE	SINGLE ROW FEMALE HEADER
X. ±0.60	X. ±5°	UNITS	mm	PITCH 2.54mm V/T TYPE H=6.8mm	
.X ±0.38	.X ±3°	SHEET SIZE	A4	SERIES	DS1023-06 SERIES
.XX ±0.25	.XX ±2°	晨翔电子有限公司 CONNELY CONNELY ELECTRONIC CO. LTD			
DRAWING TYPE	CUSTOMER				
SCALE	1:1				
DRAWING NO.	C-DS1023-06-XXX-C				