

尼龙电缆固定头(英制)

◆材质: UL尼龙6/6, 防火等级94V-2, 夹紧圈为耐由橡胶材质。

◆特点:

1. 夹紧圈经特殊设计, 拉力强, 对电机不造成损伤。
2. 不需将固定头解体, 电缆可直接穿入上紧即可, 省时方便。

◆用途: 一般机械控制箱、配电盘、机器、电器等电缆固定用。


Nylon Cable Glands

◆Material: made from UL Nylon 66, 94V-2 and tighten ring from rubber.

◆Feature:

1. Special design of clamp ring, good clamping strength and protective for electric machinery.
2. No need of disassembling the cable gland, cable can go through directly then tighten it, easy to operate and save time.

◆Application: used for machinery control box, distribution plate, machine and electrical, etc.

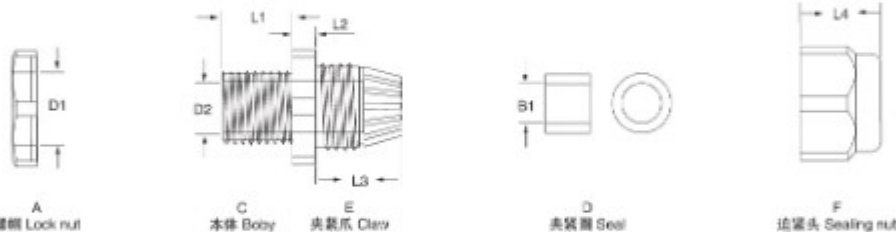

编号 Item NO.	D1(mm)	D2(mm)	L1(mm)	L2(mm)	L3(mm)	L4(mm)	B1(mm)	电缆直径范围 Cable range
PG-07	12.1	8.7	8.3	5	15.0	13.8	6.9	3.5-6
PG-09	16.2	11.1	8.7	4.6	16.1	15.7	8.9	4-8
PG-11	18.2	13.4	8.7	5.1	18.1	17.9	11.3	5-10
PG-13.5	20.1	15.5	8.9	5.0	19.2	18.3	12.8	6-12
PG-16	22.3	17.6	11.3	5.2	20.2	18.1	13.7	10-14
PG-19	24.1	19.1	11.1	5.1	21.1	20.5	15.8	12-15
PG-21	26.7	21.4	11.1	5.1	23.0	22.0	17.4	13-18
PG-24	30.1	24.8	12.8	5.8	23.9	23.7	23.1	15-22
PG-29	35.9	28.8	11.9	6.9	24.4	23.5	25.3	18-25
PG-36	46.4	39.1	16.0	7.8	30.7	27.3	31.9	22-32
PG-42	53.9	46.7	15.4	7.9	33.2	28.5	37.1	30-38
PG-48	60.2	52.6	18.0	7.9	35.5	30.3	45.1	34-44
PG-63	70.6	63.9	28.9	6.9	41.4	41.3	49.3	42-54