







REV	CONTENT	CHK	DATE
V0.0	CONTENT	CXL	20.05.11

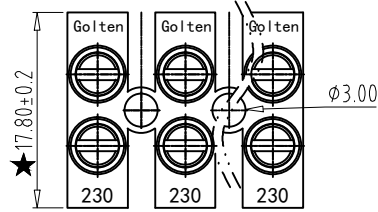

Electrical :

- | | | |
|---|----------------|------------------------|
| | UL | IEC |
| 1. Rated Voltage : | 300V | 450V |
| 2. Rated Current : | 20A | 32A |
| 3. Torque Value : | M3 , 4.43Lb.in | M3 , 0.5N.m |
| 4. Wire Range : | 20-12AWG | 0.5-4.0mm ² |
| 5. Stripping Length : | 7-8mm | |
| 6. Withstanding Voltage : | AC2000V/1Min. | |
| 7. Operating Temperature : | -40 °C~+105 °C | |
| 8. RoHS Compliance | | |
| 9. Safty Approval : | CE | |
| 10. "★" is the key quality control point. | | |

GT1450B-8.0-XXP-XX-00

- | | | | | | |
|--------------|---------------|---|------------------|---|---|
| ① | ② | ③ | ④ | ⑤ | ⑥ |
| ① Series No. | | | ④ 1 Single Pitch | | |
| | ② Pitch. | | ② Double Pitch | | |
| | ③ Poles | | ⑤ Color: 1 Grey | | |
| | 02 02Contacts | | 2 Blue | | |
| | 03 03Contacts | | 3 Black | | |
| | ... | | 4 Green | | |
| | 12 12Contacts | | 5 Orange | | |
| | | | 6 Red | | |
| | | | 7 Transparent | | |
| | | | 8 Yellow | | |
| | | | 9 White | | |

⑥ Customer Request: 00--Standard

3	SCREW	S000000030	2P	STEEL	Zn Plated
2	BLOCK	2001B00010	P	Zinc alloy	Ni Plated
1	HOUSING	2001AYYXXA	1	PA66	UL94V-0(2)
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CXL	DATE	20.05.11	SIZE	A4 UNITS mm SHEET/OF 1/1
CHK.	DATE		SCALE	1:1	
APP.	DATE		NAME	GT1450B-8.0-XXP-XX-00	
宁波冠泰电子有限公司 NINGBO GOLTEN ELECTRONICS CO., LTD.			DWGNO.	XXXX	

Total Pitch Tolerances in mm										Nominal dimension range in mm														
over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	over	=	//	over	over	
0	30	53	70	90	115	150	250	350	500	0	30	53	70	90	115	150	200	250	320	0	over	0	100	over
to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	to	150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.44	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.44	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.3	0.2	0.3	0.5