
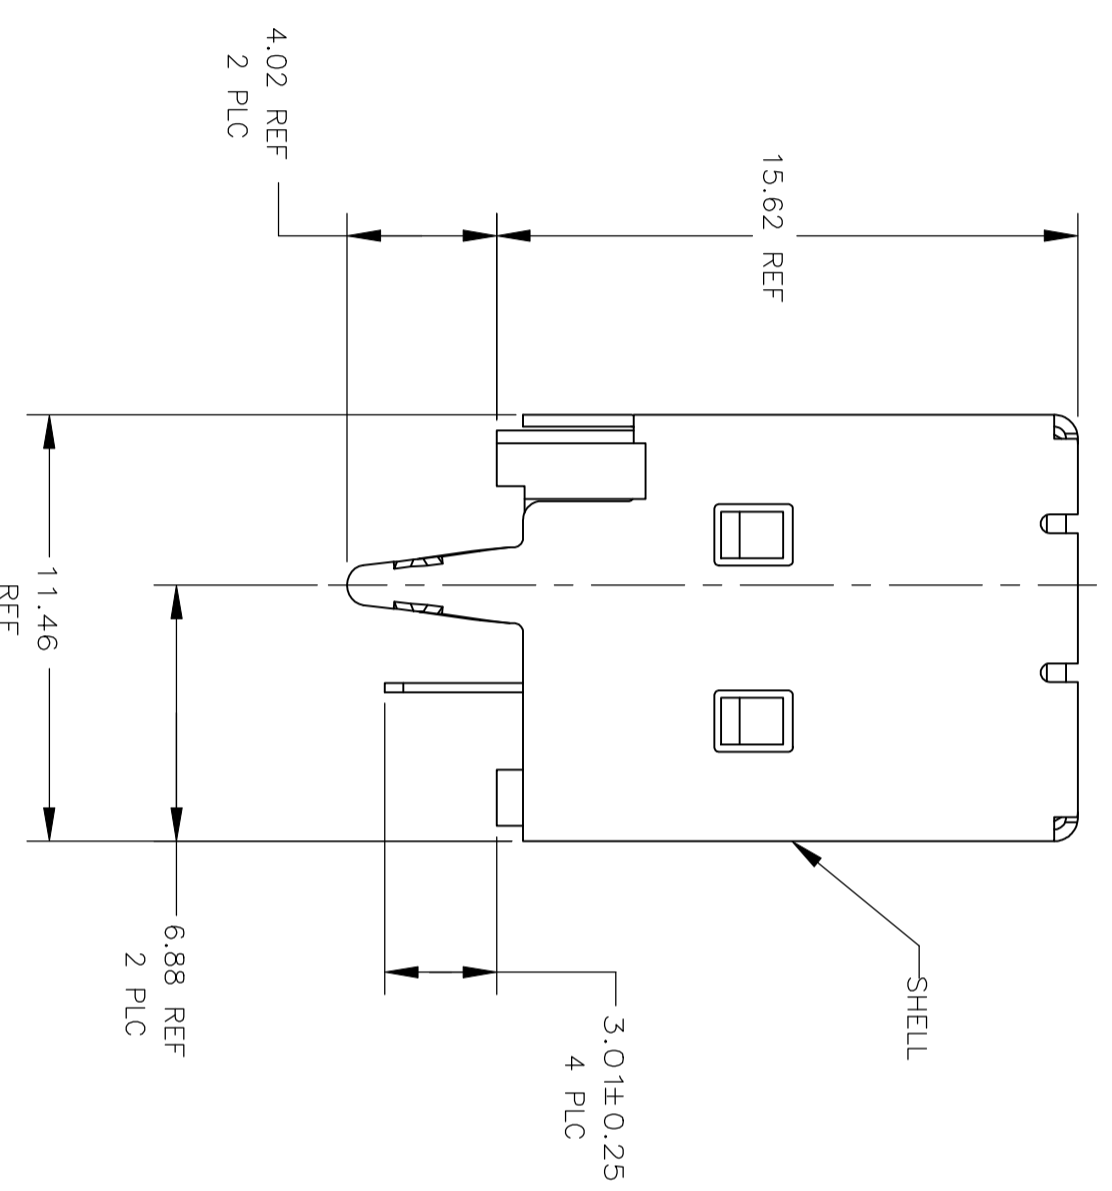


LEAD FREE

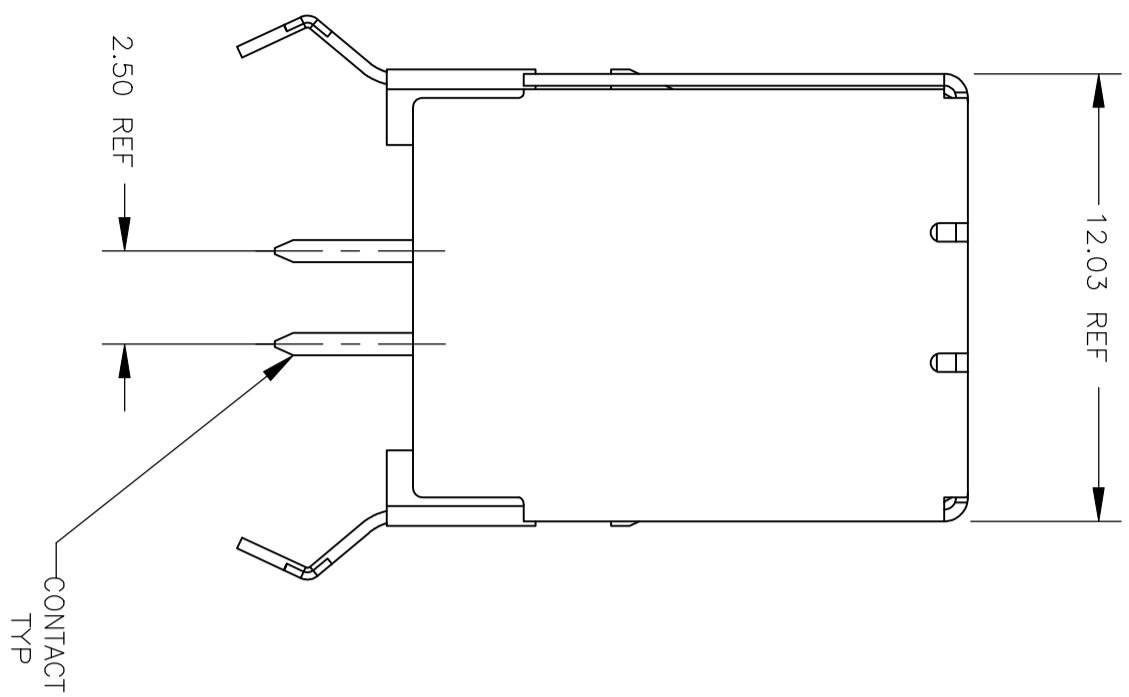

PC BOARD MOUNTING DIMENSIONS

- 1 MATERIAL:
 - ② SHELL - STAINLESS STEEL.
 - CONTACTS - COPPER ALLOY.
 - HOUSING - UL 94V-0 RATED, THERMOPLASTIC, FOR COLOR SEE TABLE.
- 2 PLATING:
 - CONTACTS - 0.076um MINIMUM GOLD OVER 0.76um MINIMUM PALLADIUM-NICKEL ON MATING AREA, 3.8um MINIMUM MATTE TIN ON SOLDER TAILS, BOTH OVER 1.27um MINIMUM NICKEL.
 - CONTACT ALTERNATE PLATING: 0.76um MINIMUM GOLD ON MATING AREA, 3.80um MINIMUM MATTE TIN ON SOLDER TAILS, BOTH OVER 1.27um MINIMUM NICKEL.
 - SHELL - 2~5um MINIMUM BRIGHT TIN.
- 3 DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER.
- 4 RECOMMENDED PC BOARD THICKNESS OF 1.57mm.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:	TOLERANCES UNLESS OTHERWISE SPECIFIED:
mm	
0 PLC	±
1 PLC	± 0.1
2 PLC	± 0.05
3 PLC	± 0.013
4 PLC	±

MATERIAL	FINISH
-1	-2

NATURAL	5787834-2
BLACK	5787834-1
HOUSING COLOR	PART NUMBER

STE TE Connectivity

RECEPTACLE ASSY, 4 POS. VERTICAL, THRU-HOLE, TYPE B UNIVERSAL SERIAL BUS

SIZE	CODE	DRAWING NO	RESTRICTED TO
A2	00779	5787834	

DMN	28MAR2004
CHK	Lyndon Wong
APPD	Steven Yoo
Product SPEC	Tokihori, Sasaki
APPLICATION SPEC	
WEIGHT	
CUSTOMER DRAWING	

5787834