


Dept	Qty
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use or reproduction of any part of this drawing without the prior written consent of CONNELY may result in legal action. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 09/25/15'	HZW 09/25/15'	LJC 09/25/15'
B	DRAWING UPDATE	JLZ 07/29/19'		
C	DRAWING UPDATE	JLZ 12/22/21'		

NOTE:

- Materials:
 - 1.1 Base: Thermoplastic, UL94 V-0, Color of white.
Temp. Range: -40°C to +105°C.
 - 1.2 Positive & Negative Contacts: Copper Alloy.
- Specification:
 - 2.1 Dielectric Withstanding Voltage: AC 500V AC.
 - 2.2 Insulation Resistance: 1000MΩ min.
 - 2.3 Contact Resistance: 100mΩ Max.
- Part Number Code:
DS1092-18 - X X X - X
 - Packing type:
R: Tape on reel
N/A Code: Tray
 - Housing material:
L: LCP
 - Contact plating:
8: Gold
 - Housing color:
W: White

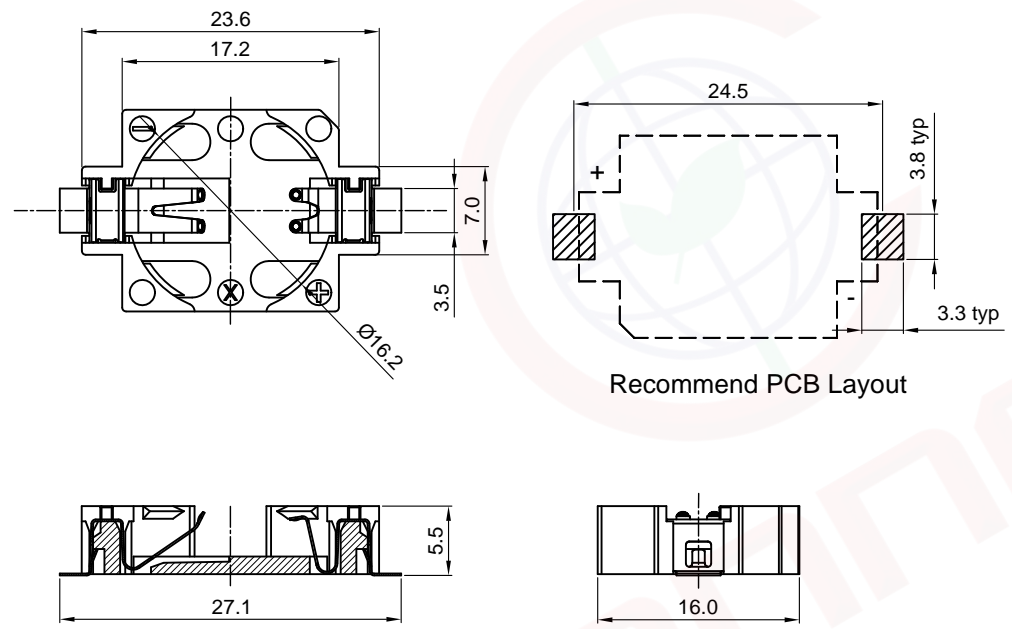

Recommend PCB Layout

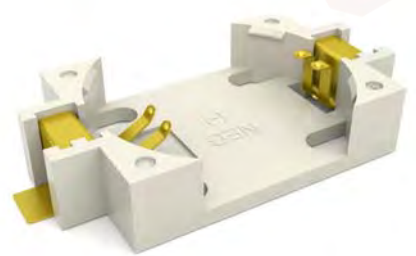

(Series Image-Reference Only)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE		CUSTOMER	
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1092-18-XXX-C		

PROJECTION		TITLE	1632 SMT BATTERY HOLDER	
UNITS	mm			
SHEET SIZE	A4	SERIES	DS1092-18 SERIES	

晨翔电子有限公司
CONNFLY CONNELY ELECTRONIC CO., LTD