


Barrier screw terminal block-
UTD-24 / 2-2D-392121

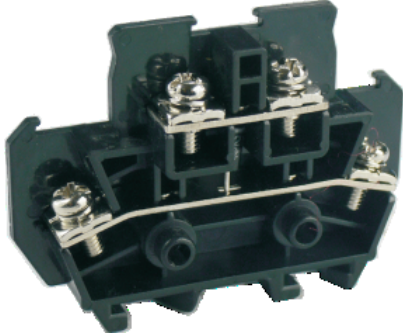

Barrier screw terminal block , rated voltage:660V ,
Max. operating current:24A, connection
method : screw connection , number of
connections : 4 , crimping
range : 0.75mm² -2.5mm² , AWG : 18-14 , t
hickness : 9.5mm , height:42mm , color : Black
, mounting
type : TH35-7.5、 TH35-15、 G32-15、 G32-18

Product parameter

| Parameter | Data |
|---------------------------------------|---------------|
| Packing unit (PCS) | / |
| NW per piece(g) | / |
| Layers | 2 |
| Number of connections | 4 |
| Rated cross section(mm ²) | 2.5 |
| Color | black |
| Insulation material | PA |
| Flame retardant grade (UL94) | V0 |
| Rated voltage(V) | 660 |
| Rated current(A) | 24 |
| Temperature of insulation material | -40 ~ +125 |
| Wire feed | Terminal side |

Product certification

| Parameter | Data |
|--------------------|-------------|
| Certification logo | CE |
| Certification logo | RoHS |

Technical data

| Parameter | Data |
|---|------------------|
| Connection Method | Screw connection |
| Screw thread | M3.5 × 8 |
| Stripping length(mm) | / |
| Tightening torque | 1.0-1.3 |
| Solid conductors(mm ²) | 0.75-2.5 |
| Solid conductors AWG | 18-14 |
| Stranded conductors(mm ²) | 0.75-2.5 |
| Stranded conductors AWG | 18-14 |
| Operating temperature () | -40 ~ +105 |
| Ambient temperature (storage/transportation) () | -25 ~ +60 |
| Relative humidity | 30% ~ 90% |
| Connection in acc. with standard | IEC 60947-7-1 |

Dimension

| Parameter | Data |
|---------------|------|
| Width(mm) | 58 |
| Thickness(mm) | 9.5 |
| Height(mm) | 42 |