




A B C D E F 1 2 3 4 5 6 7 8

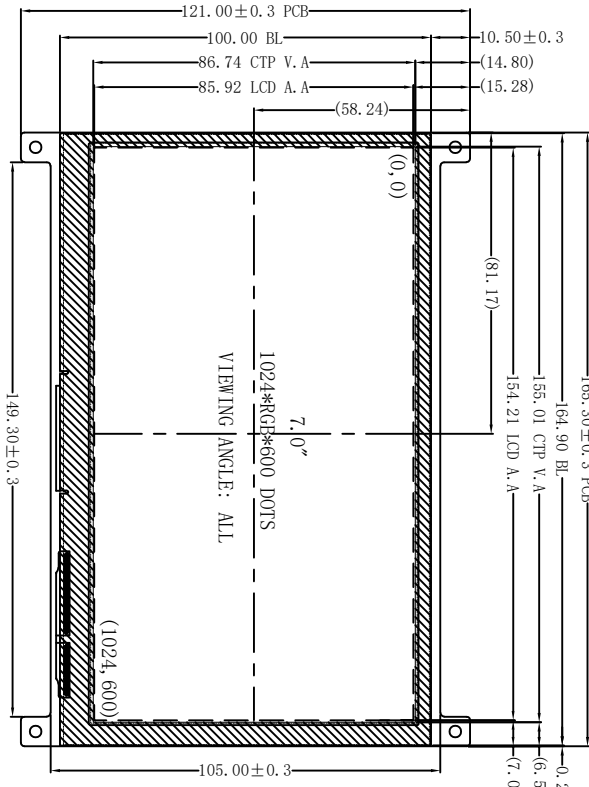

FRONT

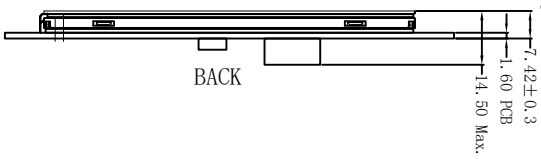

BACK

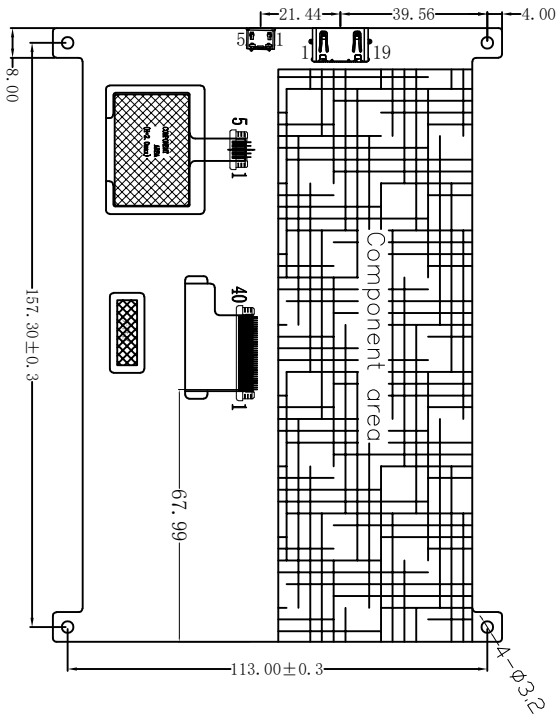

HDMI INTERFACE:

PIN	SYMBOL	DATE	NAME
1	TMDS DATA 2+	2019.03.05	Wuliyuan
2	TMDS DATA 2 SHIELD		
3	TMDS DATA 2-		
4	TMDS DATA 1+		
5	TMDS DATA 1 SHIELD		
6	TMDS DATA 1-		
7	TMDS DATA 0+		
8	TMDS DATA 0 SHIELD		
9	TMDS DATA 0-		
10	TMDS Clock+		
11	TMDS Clock SHIELD		
12	TMDS Clock-		
13	CEC		
14	RESERVED		
15	SCL		
16	SDA		
17	DCC/CEC GROUND		
18	+5V POWER		
19	HOT PLUG DETECT		


USB INTERFACE:

PIN	SYMBOL
1	VBUS (5V)
2	USB D-
3	USB D+
4	NC
5	GND

NOTES:

1. DISPLAY TYPE: 7.0TFT, NORMALLY BLACK
2. VIEWING DIRECTION: U/L/D/R 80/80/80/80
3. TFT Driver IC: HX8282A11/HX8696A01
4. CTP Driver IC: ILI2511
5. Top: -20° C ~ 70° C, Tst: -30° C ~ 80° C
6. GENERAL TOLERANCE: ±0.2
7. LCM Luminance: 350cd/m² (Typical)

LED CIRCUIT DIAGRAM:



8*3=24EA If=160mA Vf=8.1~9.6V

REVISE	Revision note	DATE	NAME
V0	First	2019.03.05	Wuliyuan



深圳市德尔西电子有限公司
Disea Electronics Co., LTD

Http://www.diseaelec.com

SIZE: TFT_LCD 7.0"

DRAWING NO.: ZW-T070BAHA-83CP-B

CUSTOMER NO.

Approved By		Checked By	
Drawn By	Wuliyuan	Checked By	
UNIT:mm		Checked By	

A B C D E F 1 2 3 4 5 6 7 8