

# 118F- 1Z- A1-1/2

# RELAY SOCKET



## CHARACTERISTICS

Ambient temperature :	-40 °C to 70°C
Rated voltage:	300VAC
Rated current :	10A (per pole)
Insulation voltage (Min.) :	5000VAC
Protection degree DIN40050 :	IP20
Socket material :	PBT V0 (UL)
Contacts spring material :	QSn6.5-0.1
Steel retainer :	available
White plastic tag :	non-available

Applicable relay type:


- 1: suit for HF118F(JQX-118F) (1 pole, 1 type).
- 2: suit for HF118F(JQX-118F) (1 pole, 2 type).

## DIMENSIONS, PC BOARD LAYOUT AND WIRING DIAGRAM


Unit: mm

### Outline Dimensions

### PCB Layout

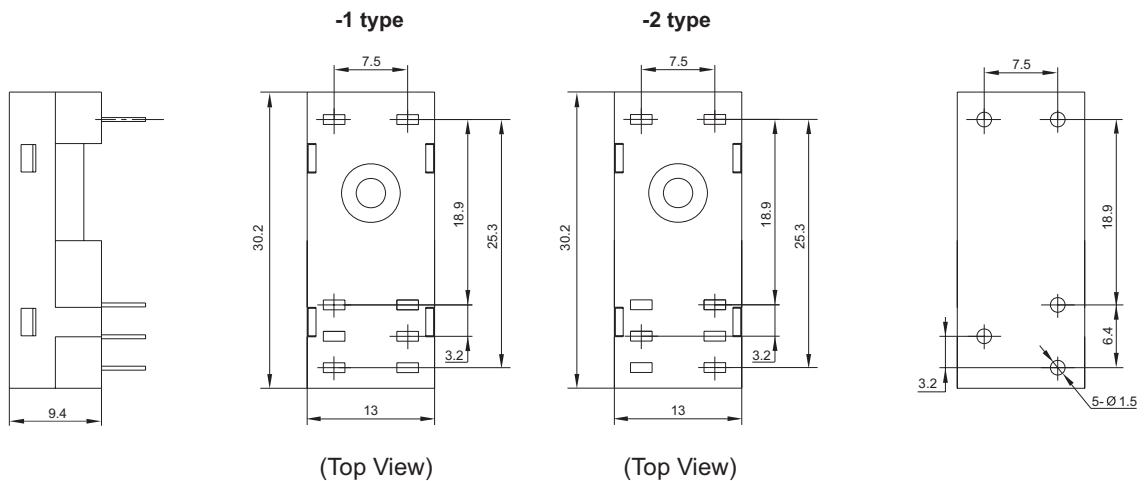

### Retainer Dimensions



HONGFA RELAY  
ISO9001、ISO/TS16949、ISO14001、OHSAS18001 CERTIFIED

2007 Rev. 1.00