

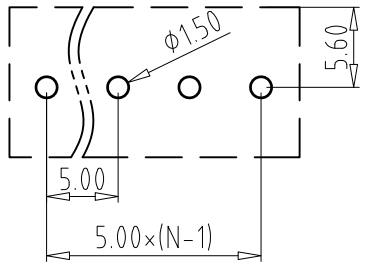
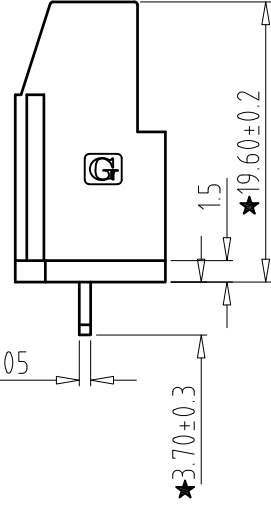

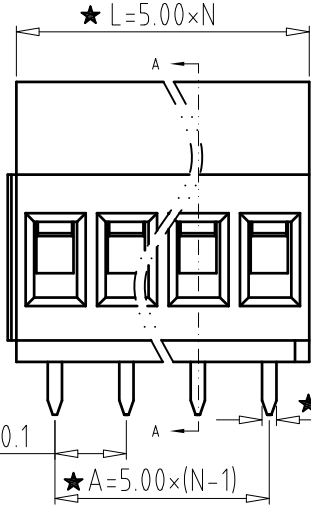


REV	CONTENT	CHK	DATE
V0.0	CONTENT	CXL	20.05.11

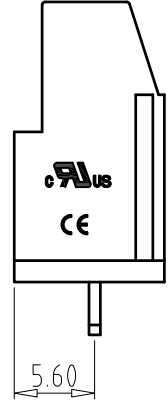

PCB LAYOUT

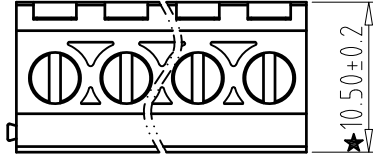

Electrical :

- | | | |
|--|---------------|------------------------|
| | UL | IEC |
| 1.Rated Voltage : | 300V | 250V |
| 2.Rated Current : | 20A | 20A |
| 3.Torque Value : | M3, 4.43Lb.in | M3, 0.5N.m |
| 4.Wire Range: | 26-12AWG | 0.5-2.5mm ² |
| 5.Stripping Length : | 6-7mm | |
| 6.Withstanding Voltage : | AC2000V/1Min. | |
| 7.Operating Temperature : | -40°C~+105°C | |
| 8.RoHS Compliance | | |
| 9.Safty Approval : | cRoHS CE | |
| 10."★" is the key quality control point. | | |

GT129 - 5.0 - XXP - X X - 01

- | | | | |
|-----|-----------------------|---|--|
| ① | Series No. | ④ | 1 Single Pitch
2 Double Pitch |
| ② | Pitch | ⑤ | Color: 1 Grey
2 Blue
3 Black
4 Green
5 Orange
6 Red
7 Transparent
8 Yellow
9 White |
| ③ | Poles | | |
| 02 | 02Contacts | | |
| 03 | 03Contacts | | |
| ... | | | |
| 24 | 24Contacts | | |
| ⑥ | Customer Request : | | |
| | 01---With cover plate | | |

5	SCREW	XX	P	Steel	Zn Plated
4	CAGE	XX	P	Brass	Ni Plated
3	PIN HEADER	XX	P	Brass	Tin Plated
2	COVER	XX	1	PA66 UL94V-0	SEE NOTE
1	HOUSING	XX	1	PA66 UL94V-0	SEE NOTE
ITEM	NAME OF PART	NO. OF PART	Q'TY	MATERIAL	NOTE
DWG.	CXL	DATE	20.05.11	SIZE	A4 UNITS mm SHEET/OF 1/1
CHK.		DATE		SCALE	1:1
APP.		DATE		NAME	GT129-5.0-XXP-XX-01
				DWGNO.	XXXX

Total Pitch Tolerances in mm										Nominal dimension range in mm										⊥	≡	-	//		
over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 250	over 350	over 500	over 0	over 30	over 53	over 70	over 90	over 115	over 150	over 200	over 250	over 320	0	over 10	all	over 0	over 100	over 150
±0.18	±0.20	±0.25	±0.3	±0.35	±0.4	±0.60	±0.70	±0.85	±0.20	±0.25	±0.30	±0.35	±0.4	±0.55	±0.70	±0.80	±0.90	0.2	0.3	0.3	0.2	0.3	0.5		