




N: NUMBER OF CONTACTS/2

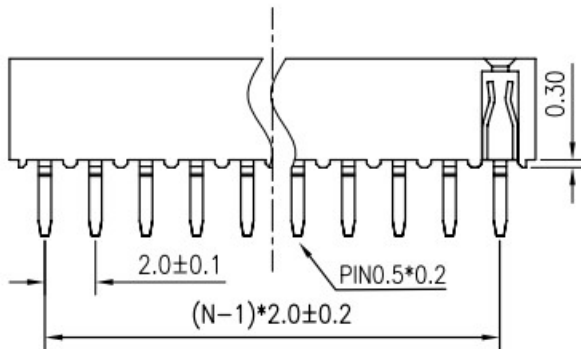

RECOMMEND PCB LAYOUT(TOLERANCE= $\pm 0.05$ )

NOTES:

1. ELECTRICAL CHARACTERISTICS:
  - 1.1 CONTACT RESISTANCE:  $20\text{m}\Omega$  Max. INITIAL.
  - 1.2 DIELECTRIC WITHSTANDING VOLTAGE:  $500\text{V AC(rms)}$  FOR 1 MINUTE.
  - 1.3 INSULATION RESISTANCE:  $1000\text{M}\Omega$  Min.
2. ENVIRONMENT CHARACTERISTICS:
  - 2.1 OPERATING TEMPERATURE:  $0^\circ\text{C} \sim +85^\circ\text{C}$ .
  - 2.2 STORAGE TEMPERATURE:  $-20^\circ\text{C} \sim +70^\circ\text{C}$ .
3. No.OF CONTACTS  
 $2 \cdot 2 - 2 \cdot N$  (10 - 80)