
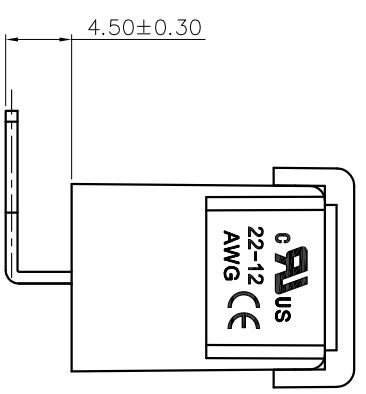
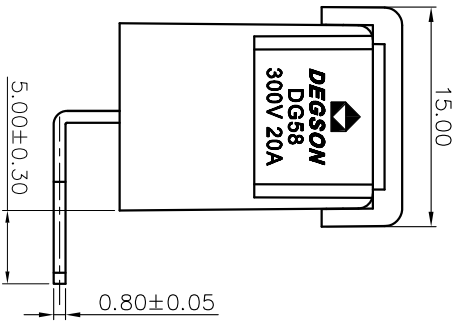
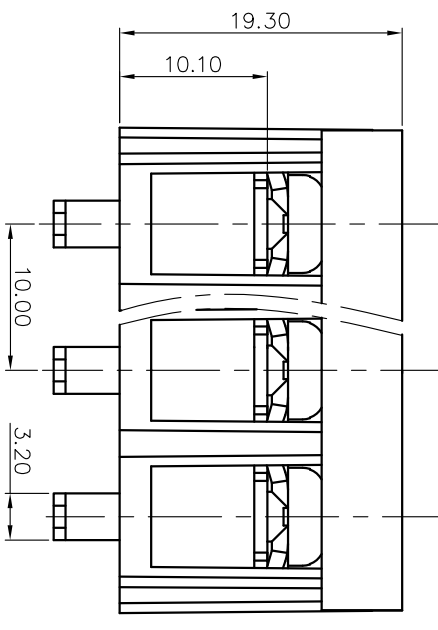


REVISION RECORD			
REV	ECN	DESCRIPTION	DRFT DATE



(w/o COVER)

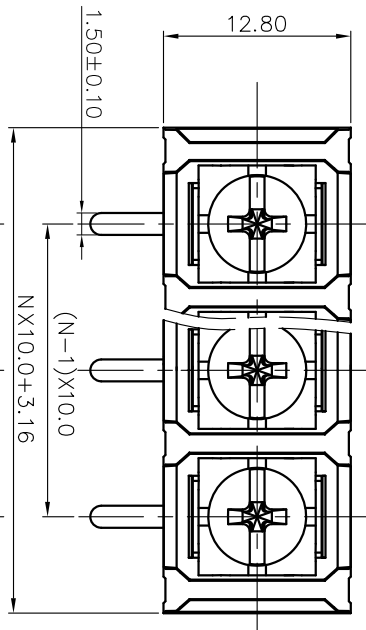

- NOTES1:
- UL Standard
  - Rated voltage/current : 300V / 20A
  - Torque value : M4 , 10.53Lb.in
  - Wire range : 22~12AWG
- NOTES2:
- Dimension shall be interpreted per ASME Y14.5-2009
  - Pitch : 10mm, Poles : N=02~22P
  - Withstanding voltage : AC1600V/1Min
  - Operating temperature: -40°C~+105°C
  - Undimensioned tolerances:

Pitch range in mm	Nominal dimension range		mm	mm	mm	mm	mm
	Over	Over					
6	10	30	60	100	150	150	0.1/10
TO	TO	TO	TO	TO	TO	TO	≤
6	10	24	30	60	100	150	±2°
F0.15	F0.20	F0.30	F0.30	F0.50	F0.70	F1.00	F1.30

6.RoHS Compliance

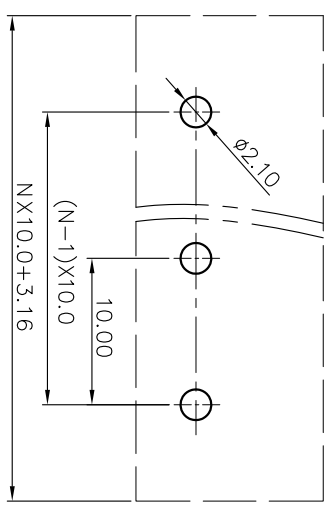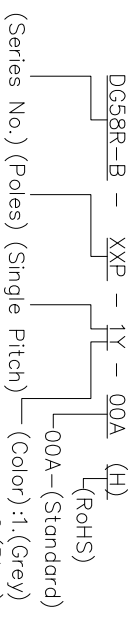

PCB LAYOUT

DETACHED LISTS			
PART NO.:	/	NAME:	DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD 宁波高松电子有限公司
APPD:	/	TITLE:	CUSTOMER DRAWING
CHKD:	/	DRWING NO.:	/
DRFT:	/	DO NOT SCALE DRAWING	SCALE
THIRD ANGLE PROJECTION		REV	DO
		SHEET	1/1
		SCALE	1:1

A 8 7 6 5 4 3 2 1