


SURFACE MOUNT SCHOTTKY BARRIER RECTIFIERS

FEATURES

- High Performance & Reliability best suited for Automotive application
- For surface mount applications
- Metal-Semiconductor Junction with Guarding
- Epitaxial Construction
- Metal-Semiconductor Junction with Guarding Very
- Low forward voltage drop
- High Current capability
- For use in low voltage, high frequency inverters, Free wheeling, and polarity protection applications
- High temperature soldering guaranteed: 250 °C/10 seconds at terminals

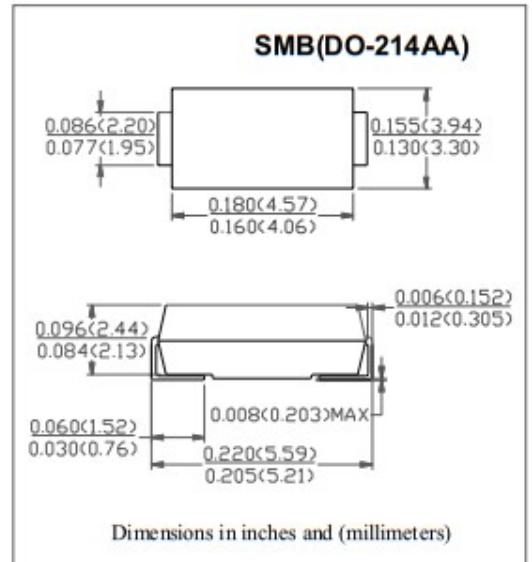

MECHANICAL DATA

- Case: Molded Plastic
- Terminals: Solder Plated, Solderable per MIL-STD-750 Method 2026
- Polarity: Indicated by Cathode Band
- Weight: 0.003ounce, 0.093gram

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60Hz, resistive or inductive load for capacitive load derate current by 20%.

	SYMBOLS	SS22	SS23	SS24	SS25	SS26	SS28	SS29	SS210	UNITS
Maximum Repetitive Peak Reverse Voltage	VRRM	20	30	40	50	60	80	90	100	Volts
Maximum RMS Voltage	VRMS	14	21	28	35	42	56	63	70	Volts
Maximum DC Blocking Voltage	VDC	20	30	40	50	60	80	90	100	Volts
Maximum Average Forward Rectified Current at TL=105°C	I(AV)						2.0			Amps
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	IFSM						50			Amps
Maximum Forward Voltage at 2.0A DC	VF		0.55		0.75		0.85			Volts
Maximum DC Reverse Current at rated DC blocking voltage (Note 1)	IR				0.5					mA
					15.0					
Typical Junction Capacitance (Note 1)	CJ				75					pF
Typical thermal capacitance (Note 2)	RQJL				15					°C/W
Operating Temperature Range	T _J				-55 to +125					
Storage temperature range	T STG				-55 to +150					°C

NOTES:

1. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.
2. Thermal Resistance Junction to Lead.