


Category: 插拔式端子-插头/Plug-in terminal-plug

Product name: MC-RF3.5HXXP-I-0001

Product Description: 3.5mm , 160V , 8A CE



## Product Picture

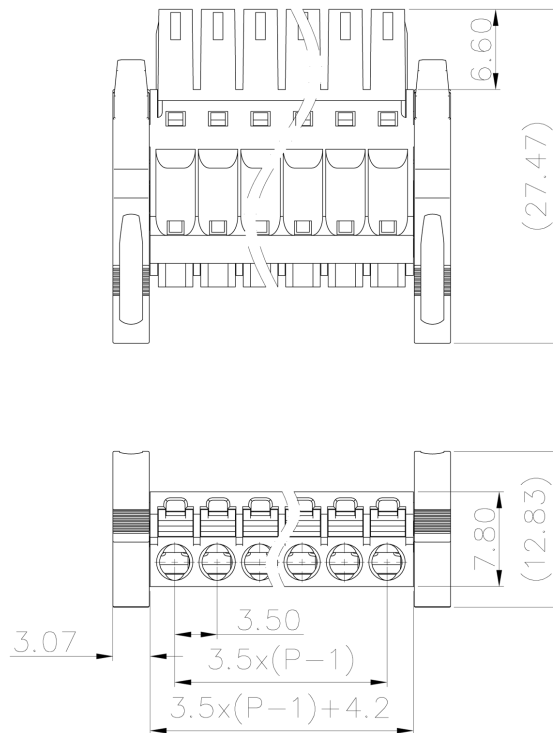

## 基本信息 /Basic Information

产品型号  
SUPU ID MC-RF3.5HXXP-I-0001

产品间距  
Pitch 3.5mm

产品层数  
Number of levels 1

产品位数  
Number of connections 2P-24P

接线方式  
Connection method 直插弹簧接线Push in connection

防护等级  
Protection Level IP20

工作温度 Work temperature	-40~+105°C
--------------------------	------------

## IEC数据 /IEC Data

额定电流 Rated Current	8A		
额定电压 Rated Voltage	160V		
过压类别 Overvoltage category	III	III	II
污染等级 Pollution degree	3	2	2
额定冲击电压 Rated impulse voltage	2.5KV	2.5KV	2.5KV
额定电压 Rated Voltage	160V	160V	320V
硬导线截面积 Conductor cross section solid	0.2-1.5mm <sup>2</sup>		
柔性导线截面积 Conductor cross section flexible	0.2-1.5mm <sup>2</sup>		
柔性导线截面积，带绝缘管套 Conductor cross section flexible,with furrule	0.2-1.5mm <sup>2</sup>		
锁线螺钉规格 Locking screw Specification	-		
额定扭矩 Rated Torque	-		
固定螺钉规格 Fixed Screw Specification	-		
额定扭矩 Rated Torque	-		
剥线长度 Stripping length	10mm		

## UL数据 /UL Data

使用组别 Use group	B	C	D
额定电流 Rated Current	8A	8A	-
额定电压 Rated Voltage	150V	50V	-

---

额定接线容量 Rated cross section	24-16AWG
-------------------------------	----------

---

## 材料信息 /Material Data

---

绝缘材料 Insulation material	PA66
绝缘材料组别 Insulation material group	I
阻燃等级, 符合UL94 Flame retardant grade, UL94 compliance	V0
导电体材料 Contact material	Copper alloy
导电体表面镀层 Surface characteristics	Tin,Plated

---

## 产品认证 /Product Certification

---

认证图标 Certificate	
---------------------	--

---

UL证书号 UL file No.
----------------------

---

VDE证书号 VDE No.
-------------------

---

TUV证书号 TUV No.
-------------------

---

Ningbo Supu Electronics Co.,Ltd

Zip code: 315303

Fax: +86 574-63288170

E-mail : askme@supu.cn

Address: No. 625, Kandun Town Street, Cixi  
City, Zhejiang Province

Switchboard: +86 574-63288158

E-mail : askme@supu.cn

Service Hotline: 400-626-6336



Code