



Box Header Series

KLS1-201Y I.D.C. EJECTOR HEADER 2.54mm(0.100")

Electrical Characteristics:


Current Rating: 1 AMP
 Insulator Resistance: 5000MΩmin. at DC 500V
 Contact Resistance: 20mΩmax. at DC 100mA
 Operating Temperature: -45°C~+105°C

Material:

Housing: 30% Glass filled PBT UL94V-0
 Contacts: Brass
 Plating: Selective gold plated : gold plated on mating area and nickel plated on wire Cutting area
 Cable: 1.27mm(0.050")pitch flat cable

Features:

- * Fully shrouded provides ultimate reliability,
- * Mounting ears optional.

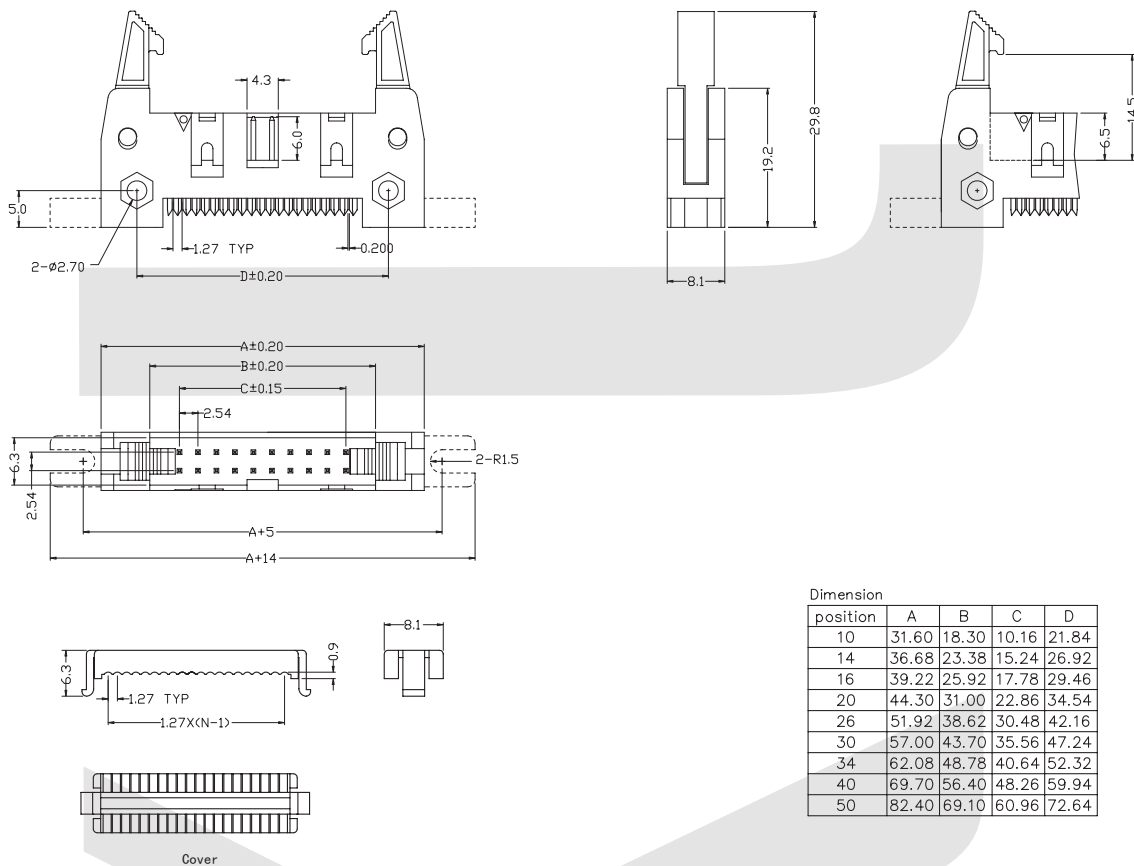

ORDER INFORMATION

Product No.: KLS1-201Y-XX-B-E

Pos. No. _____ E=With Ears N=Without Ears
 I.D.C. Ejector Header 2.54mm Series _____ Insulator Color: B=Black G=Gray
 _____ Number of Contacts: XX=10~50Pin