

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCh 09/04/10'	~	

NOTES:

- SPECIFICATIONS:
 - CONTACT RESISTANCE: 30mΩ(max.) INITIAL FOR VBUS AND GND CONTACTS. 50mΩ(max.) INITIAL FOR ALL OTHER CONTACTS.
 - INSULATOR RESISTANCE: 100MΩ min. AT 100V DC.
 - CURRENT RATING: 1.8A FOR VBUS PIN AND ITS CORESPONDING GND PIN. 0.25A (MIN.) FOR ALL OTHER CONTACTS
 - VOLTAGE RATING: 30V AC/DC.
 - DIELECTRIC STRENGTH: AC 100V FOR 1 Minute.
 - OPERATING TEMPERATURE: -40°C ~ +105°C.



2. MATERIALS:

- HOUSING: THERMOPLASTIC (UL 94-0).
- CONTACT: COPPER ALLOY
- SHELL: COPPER ALLOY.



3. PRODUCT NUMBER CODE:

DS1107-01 - X X X


- CONTACT PLATED:
 - 0: Selective Gold Flash
 - C: 3u" Gold
 - 3: 30u" Gold
- SHELL PLATED:
 - N: Nickel
 - 6: Tin
- COLOR OF HOUSING:
 - L: Blue
 - W: White
 - B: Black

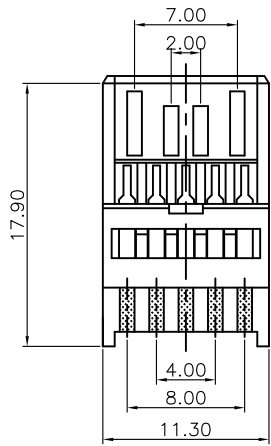

Housing with contact

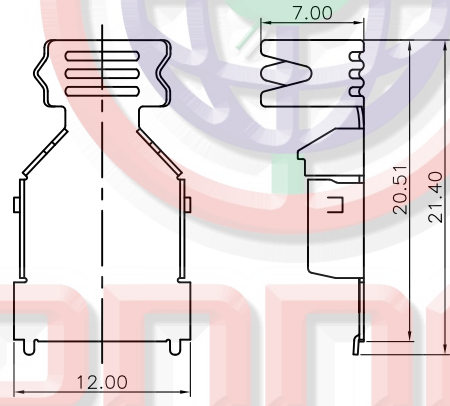

Upper shell

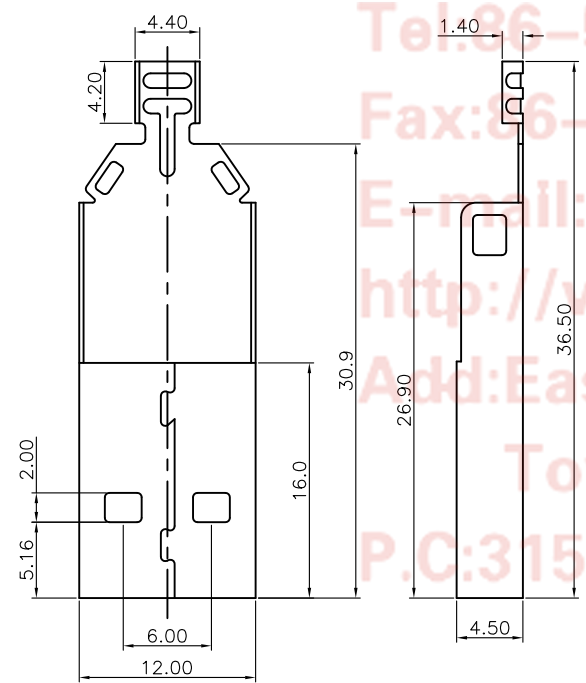

Down shell

Tel: 86-574-63508787
 Fax: 86-574-63510817
 E-mail: sale@connfly.com
 http://www.connfly.com
 Add: East Industry Zone KuangYan
 Town Cixi Ningbo China
 P.C: 315333

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	USB 3.0 PLUG A TYPE		
X.	±0.60	X.	±5°	UNITS	mm		MALE SOLDER TYPE		
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1107-01		
.XX	±0.25	.XX	±2°						
DRAWING TYPE		CUSTOMER			晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD				
SCALE		1:1	SHEET 1 OF 1						
DRAWING NO.		C-DS1107-01-XXX							