


Screw clamping terminal block-
UKHV-4 / 2-2L- 011438

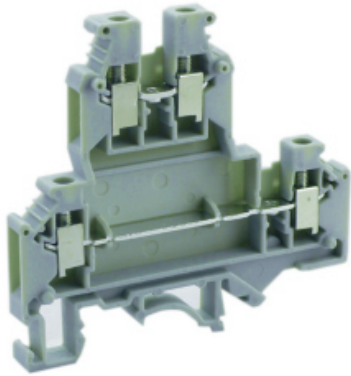


Screw clamping terminal block , rated voltage:1000V , Max. operating current:32A, connection method : screw connection , number of connections : 4 , crimping range : 0.2mm² -4mm² , AWG : 24-12, thickness:6.2mm , height:71mm , color : black , mounting type : TH35-7.5、 TH35-15、 G32-15、 G32-18

Product parameter

| Parameter | Data |
|---------------------------------------|---------------|
| Packing unit (PCS) | 60 |
| NW per piece(g) | 16.4 |
| Layers | 2 |
| Number of connections | 4 |
| Rated cross section(mm ²) | 4 |
| Color | black |
| Insulation material | PA |
| Flame retardant grade (UL94) | V0 |
| Rated voltage(V) | 1000 |
| Rated current(A) | 32 |
| Temperature of insulation material | -40 ~ +125 |
| Wire feed | Terminal side |

Product certification

| Parameter | Data |
|--------------------|--|
| Certification logo |  |

Technical data

| Parameter | Data |
|-----------|------|
| | |

| Parameter | Data |
|---|------------------|
| Connection Method | Screw connection |
| Screw thread | M3 |
| Stripping length(mm) | 8mm |
| Tightening torque | 0.6-0.8Nm |
| Solid conductors(mm ²) | 0.2-4 |
| Solid conductors AWG | 24-12 |
| Stranded conductors(mm ²) | 0.2-4 |
| Stranded conductors AWG | 24-12 |
| Operating temperature () | -40 ~ +105 |
| Ambient temperature (storage/transportation) () | -25 ~ +60 |
| Relative humidity | 30% ~ 90% |
| Connection in acc. with standard | IEC 60947-7-1 |

Dimension

| Parameter | Data |
|---------------|------|
| Width(mm) | 73 |
| Thickness(mm) | 6.2 |
| Height(mm) | 71 |